

Product Features

- 12 high output white LEDs.
- Lamp colour - 5000K.
- Lamp power - 0.7W.
- 99 lumens in emergency.
- Competitively priced, LED EXIT sign.
- Easy to install and maintain.
- Integrated down-lighter.
- IP20 as standard.
- 35m viewing distance.
- Class I.

Materials


- Body - powder coated sheet steel.
- Panel - flame retardant opal ABS plastic.
- Batteries (self-contained) - 3.6V 1.8A/h Ni-Cd.

Installation notes

- Suitable for wall mounting.
- 20mm cable entry on side of unit.
- 20mm cable entry on rear of unit.
- Dimensions - See diagram.
- Weight: 1.5Kg.
- Temperature range - 0°C to 45°C.



*Equipment dimensions may vary with different systems.

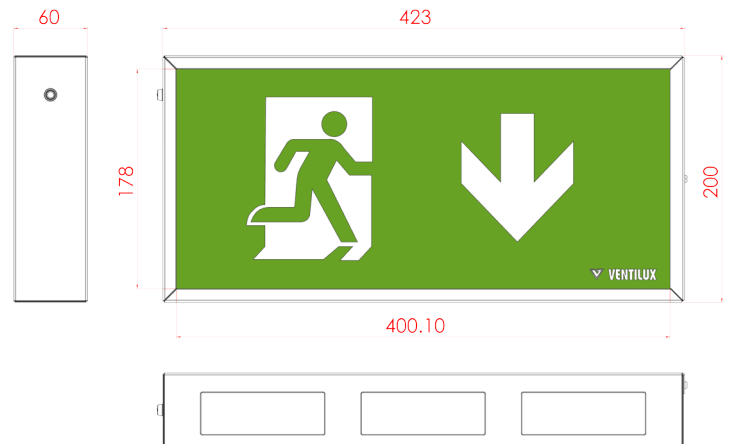

Colours: White - RAL 9016

System Mode

Self contained. Maintained 3 hour

Part Number

EBM3/LED
Choose arrow direction.
01 - Left, 02 - Down, 03 - Right or 04 - Up.

EXIT sign legend options



ISO 7010



EDF

Commercial Range products carry **3 years warranty** as standard.

For Warranty Terms please visit the Ventilux website