

# ALPHA

COMMERCIAL RANGE

## Product Features

- Lamp colour - 4000K.
- Mains 18 Watt 1800 lumens.
- Emergency 2 watt 180 lumens.
- Modern and minimalist design, screw-less from front.
- IP65 ingress protection
- IK10 impact resistance.
- Supplied with asymmetrical lenses for optimal mains and emergency light distribution.
- Class I.

## Materials


- Housing - Die-cast aluminum.
- Diffuser - Polycarbonate plastic.
- Accessories - Screws & installation mounting bracket.
- Battery - LiFePo4 6.4V 1.5Ah.

## Installation notes

- Suitable for wall mounting.
- Suitable for rear and side cable entry.
- Suitable for conduit and BESA box installation.
- PCB integrated with diffuser for easy installation.
- Dimensions - See diagram.
- Weight: 2.75Kg.
- Temperature: 0°C to 45°C.



\*Equipment dimensions may vary with different systems.

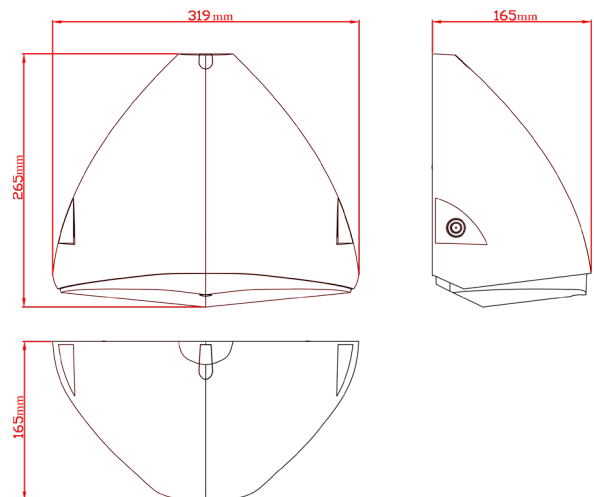

- Colours:**
- White - RAL 9016 - add /WH to order
  - Grey - RAL 7004 - add /GY to order
  - Black - RAL 9017 - add /BL to order

## System Mode

Maintained 3 hour

ALPHA product is also available in Mains 230V

Commercial Range products carry 3 years warranty as standard.

Alternative Warranty option

6 Years

Add /6Y to Part Number

For Warranty Terms please visit the Ventilux website

Also available



## Part Number

ALM3/LED



This specification sheet is a generic specification sheet. Specific specification sheets for Central Battery, Addressable Testing Systems etc are available from Ventilux upon request.