

ATLANTIC SP DALI

PREMIUM RANGE

Product Features


- Panel - 14 white SM2835 LEDs.
- Lamp colour - 5000K.
- Lamp power - 1 Watt.
- Self test as standard.
- Aesthetically pleasing, single/double sided, wall and ceiling mounted EXIT luminaire.
- Standard 1000mm suspension distance.
- IP20 as standard.
- 30m viewing distance.
- Class II.

Materials


- Body - flame retardant ABS.
- Panel - flame retardant acrylic.
- Legend - flame retardant PVC.
- Batteries (self-contained) - 3.6V 2.1A/h Ni-Mh.

Installation notes

- Suitable for ceiling mounting.
- Supplied with ISO 01, 02, 03 and 04 decals for flexibility on site.
- 20mm cable entry on base of unit.
- Suitable for recessing with recessing kit sold separately. Specify product code AT/RK for recessing kit.
- Dimensions - See diagram.
- Weight: 1.2Kg.
- Temperature range - 0°C to 45°C.

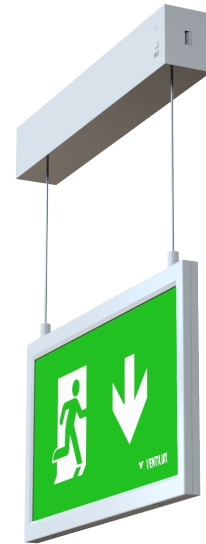

*Equipment dimensions may vary with different systems.

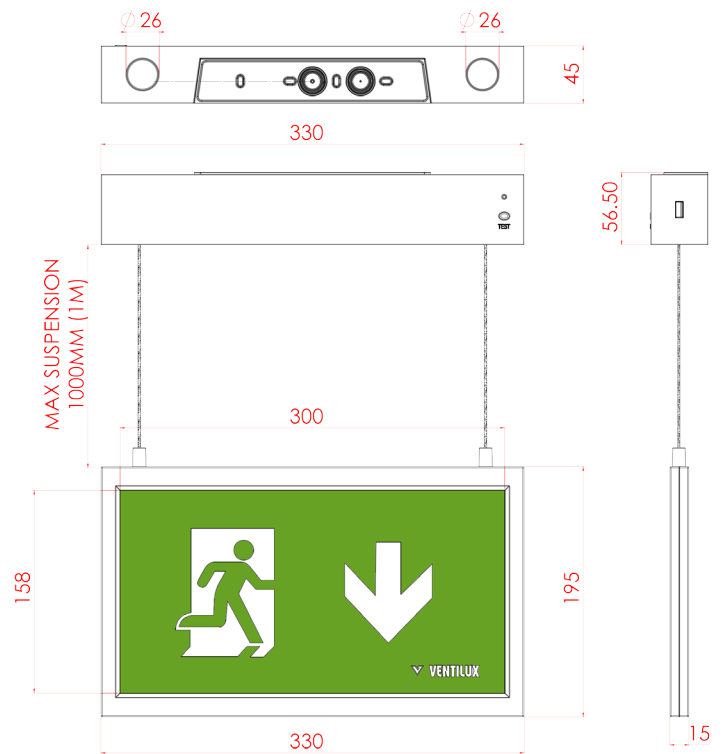

Colours:



White - RAL 9016



Black - RAL 9017 - add /BL to order code

System Mode

Self contained DALI

Recessing kit

Part Number

ATSPM3/LED/DA/6Y

AT/RK


EXIT sign legend options



ISO 7010



EDF

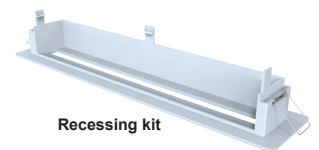

Recessing kit



Premium Range products carry **6 years warranty** as standard.

Alternative **Warranty** options

For Warranty Terms please visit the Ventilux website

3 Years

/3Y

10 Years

/10Y