

ATLANTIC SP DALI

PREMIUM RANGE


Product Features


- Panel - 14 white SM2835 LEDs.
- Lamp colour - 5000K.
- Lamp power - 1 Watt.
- Self test as standard.
- Aesthetically pleasing, single/double sided, wall and ceiling mounted EXIT luminaire.
- Standard 1000mm suspension distance.
- IP40 as standard.
- 30m viewing distance.
- Class II.

Materials


- Body - flame retardant ABS.
- Panel - flame retardant acrylic.
- Decal - flame retardant PVC.
- Batteries (self-contained) - 3.6V 2.1Ah Ni-Mh.

Installation notes

- Suitable for ceiling mounting.
- Supplied with  decals for flexibility on site.
- 20mm cable entry on base of unit.
- Suitable for recessing with recessing kit sold separately. Specify product code AT/RK for recessing kit.
- Dimensions - See diagram.
- Weight: 1.2Kg.
- Temperature range - 0°C to 45°C.

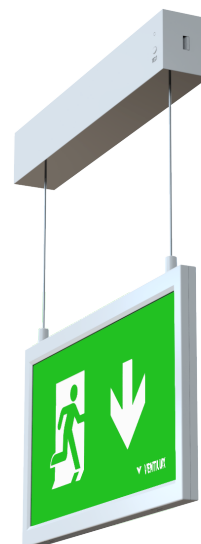

*Equipment dimensions may vary with different systems.

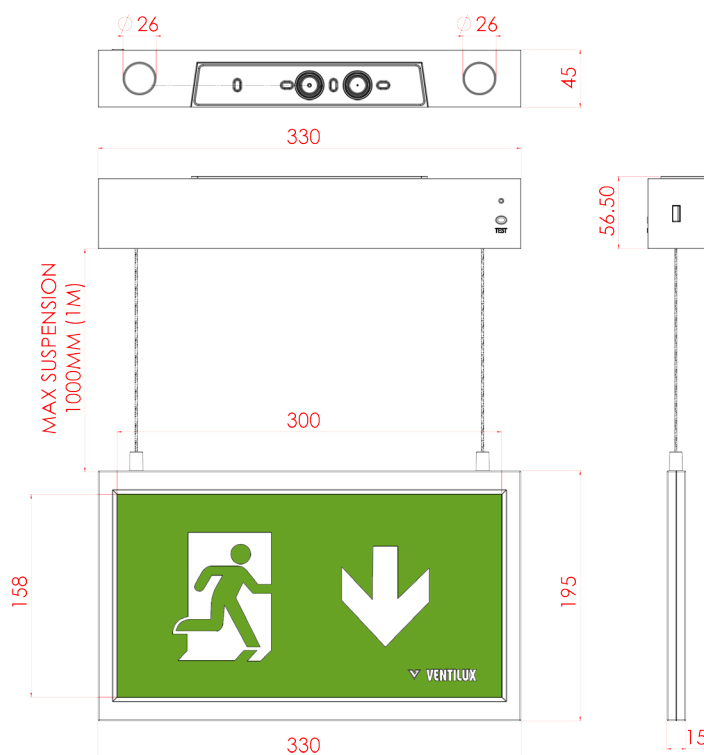

EXIT sign legend options



ISO 7010

*Special legends available upon request.

Standard colour: White - RAL 9016

System Mode

Self contained DALI

Recessing kit

Part Number

ATSPM3/LED/DA

AT/RK


Premium Range products carry 6 years warranty as standard.

Alternative **Warranty** option

10 Years

Add /10Y to Part Number

For Warranty Terms please visit the Ventilux website

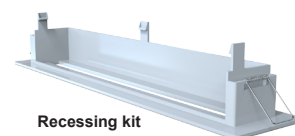

Recessing kit

