


Atlantic Gen 2

Exit Sign



With Additional
Recessing Kit

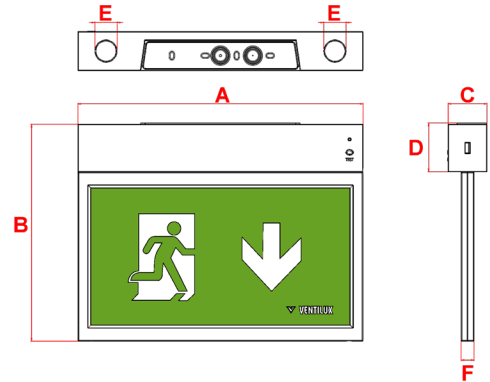

30m
Viewing
Distance

IP
40

LiFePO4
Battery

Wall and
Ceiling
Mounting

1.4Kg

5700K

Class
II

8Y
Warranty

Materials

Housing: ABS
Decal Legend: Polypropylene

Standard Colour: White - RAL 9016

Alternative Colour: Black - RAL 9017
Add /BL to order code

Warranty

Standard Warranty: 8 Years
Alternative Warranty: 10 Years
Add /10Y to order code

Order Code	AT2M3/LED
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	5.8VA, I _{nom} = 24mA (Full Battery)
Battery type	Rechargeable LiFePO4 Battery 6.4V 0.6Ah
Battery low voltage cut off	5.7V DC
Battery discharge current @ 6.4V DC	0.15A
Lamp	1W LED Strip
Lamp colour	5700K
Lamp Life	L ₈₀ B ₅₀ 80000 Hours
Viewing Distance	30m
Nominal lamp voltage	V _{rated} = 5.5V DC
Nominal lamp current @ 6.4V DC	I _{rated} = 0.14A
Nominal lamp power	P _{rated} = 1W
Maximum output voltage with no lamp connected	U-OUT = 10V DC
Ingress Protection	IP40
Cable entry	20mm on top and rear of product
Luminaire class	Class II
Product Weight	1.4Kg
Packaging Weight	0.16Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)					
						A	B	C	D	E	F
Standalone	AT2M3/LED	Maintained	LiFePO4 6.4V, 0.6Ah	70270	30	330	250	45	56.5	26	15
Alternative Systems: Specification sheets available upon request											
DALI	AT2M3/LED/DA	Maintained	LiFePO4 3.2V, 3.2Ah	70261	30	330	250	45	56.5	26	15
DALI Wireless	ATM3/LED/DAW	Maintained	LiFePO4 3.2V, 3.2Ah	70261	30	330	275	60	80	26	15
Self-Test	AT2M3/LED/ST	Maintained	LiFePO4 3.2V, 3.2Ah	70261	30	330	250	45	56.5	26	15

Available Accessories

Order Code	Description	Material	Cutout (mm)	Dimensions(mm)
AT/RK	Recessing Kit	ABS	370 x 55	390 80

Included Legends



ISO 01



ISO 02



ISO 03



ISO 04