

VENTILUX DALI CONTROLLER


Product Features

- Colour touch screen (7").
- Background lighting with RGB LEDs.
- User-friendly application software.
- With DALI system functions of addressing and grouping.
- Ethernet CAT 5e RJ45 interface.
- Up-/downloading of the emergency lighting test report and firmware via Ethernet.
- Integral DALI power supplies on channel A and B.
- Internal power supply - connects directly to incoming supply.




Installation notes

- For small and medium emergency lighting systems with up to 120 DALI emergency lighting units (60 for each DALI line).
- Function and endurance tests can be conducted in accordance with local regulations.
- Individual labelling of groups and devices.
- Calendar-controlled function and duration test.
- Interconnection of multiple panels via cloud based solution for bigger installations.
- Flush or surface mounting options.
- Dimensions - See diagram.
- Cutout size - 205mm x 118mm.
- Weight: 760g (Without power supplies and controls).
- Temperature: 0°C - +50°C.
- IP20.

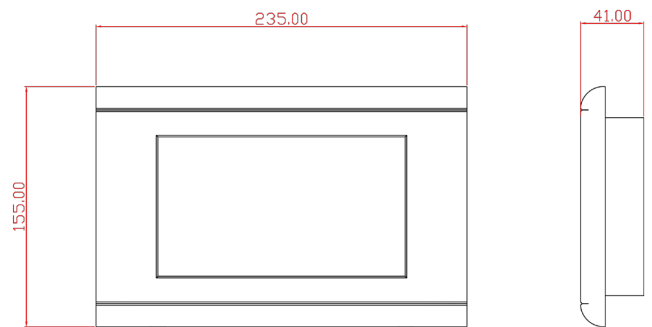

**PLEASE NOTE
FOR REFERENCE PURPOSES ONLY**

Wiring Diagram – Self-Contained emergency operation

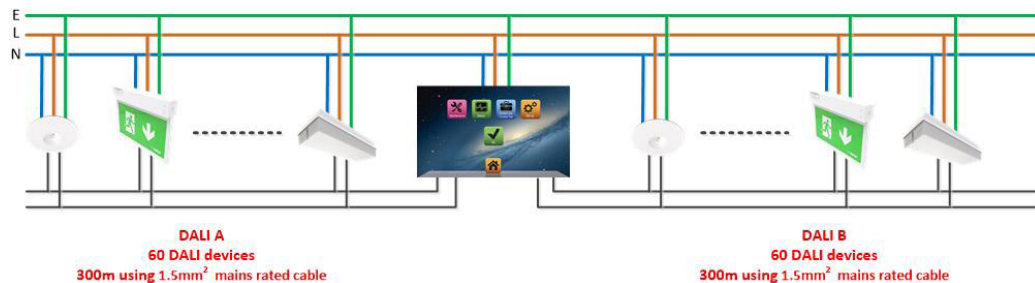

Colours: White - RAL 9016

System Mode

DALI controller - 120 devices

Part Number

VENT/DALI/CPS2

DALI products carry 6 years warranty as standard.

Alternative **Warranty** option

10 Years

Add /10Y to Part Number

For Warranty Terms please visit the Ventilux website