


# DALI Wireless Control Panel

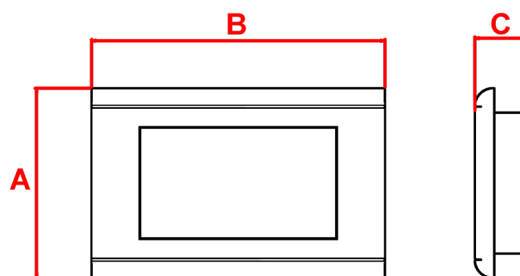

## Product Features

- Colour touchscreen (7").
- DALI system functions of addressing and grouping.
- Ethernet CAT 5e RJ45 interface.
- Up/downloading of the emergency lighting test report and firmware via Ethernet.
- Internal power supply - connects directly to incoming supply.
- Individual labelling of groups and devices.
- Calendar-controlled function and duration test.
- Function and endurance tests can be conducted in accordance with local regulations.

Order Code	<b>VENT/DALI/WCP</b>
DALI Interface	Wireless
Input voltage	100-240V 50/60Hz
Power consumption	5.5W
Degree of protection	IP20
Maximum Luminaire Connections	128
Cable entry	Rear Access
Mounting Options	Flush/ Semi- Recessed as Standard, Surface Mount -Optional (Back box ordered separately)
Cut-Out dimensions for Flush & Semi-Recesing options	205mm(W) X 118mm(H)
Incoming cable size cross sectional area mm <sup>2</sup>	1.5mm <sup>2</sup> to 2.5mm <sup>2</sup> single conductor
Strip length of mains wire conductor	5.0mm - 6.0mm

## Materials

Housing: Polycarbonate  
Standard Colour: White - RAL 9016

## Warranty

Standard Warranty: 8 Years  
Alternative Warranty: 10 Years  
Add /10 Years to Order Code

System	Order Code	Power Consumption	Dimensions (mm)		
			A	B	C
DALI	VENT/DALI/WCP	5.5W	155	235	41
Available Accessories					
Order Code	Description	Material	Dimensions(mm)		
VENT/DALI/BACKBOX	Surface Mounting Box	Polycarbonate	155	235	55

**PLEASE NOTE  
FOR REFERENCE PURPOSES ONLY**

Wiring Diagram – Self-Contained emergency operation

