


ETS

IP65 DALI Twinspot

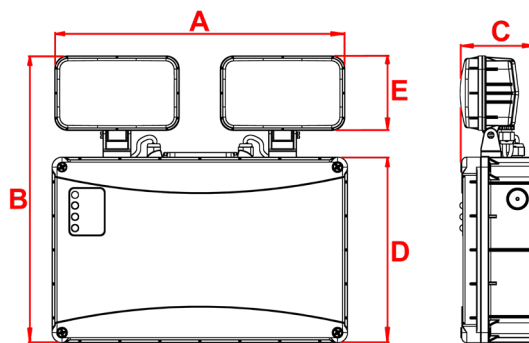

2x188
Lumens

2 x 2
Watts

6500K

Wall
Mounting

NiCd
Battery

Class
I

IP
65

6Y
Warranty

Materials

Housing: Polycarbonate

Standard Colour: White - RAL 9016

Alternative Colours Available Upon Request

Warranty

Standard Warranty: 6 Years
Alternative Warranty: 10 Years
Add /10 Years to Order Code

| | |
|---|--|
| Order Code | ETSLED/NM3IP65DA |
| Mode of operation | Non-Maintained Dali |
| DALI Interface | For Controlled Monitoring and Reporting |
| Emergency duration | 3 hours |
| Input voltage | 230/240V (207VAC - 264VAC) 50/60Hz |
| Power consumption | 3.1VA, $I_{nom} = 13mA$ (Full Battery) |
| Battery type | Rechargeable NiCd Battery 6V 4.5Ah |
| Battery low voltage cut off | 4.8V DC |
| Battery discharge current @ 6.4V DC | 0.94A |
| Lamp | 4W LED (2 x 2W) |
| Lamp colour | 6500K |
| Lamp lumen level in emergency | 2 x 188 lumens |
| Nominal lamp voltage | $V_{rated} = 19.7V$ DC |
| Nominal lamp current | $I_{rated} = 0.13A$ CC (Per Lamp) |
| Nominal lamp power | $P_{rated} = 2 \times 2W$ |
| Maximum output voltage with no lamp connected | U-OUT = 60V DC |
| Ingress protection | IP65 |
| Cable entry | 20mm on rear, side and top of product |
| Luminaire class | Class I |
| Product Weight | 1.7 Kg |
| Packaging Weight | 0.14Kg |
| Standards | EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015 |
| Environment | 0°C to 45°C up to 80% relative humidity |

| System | Order Code | Mode of Operation | Battery | Battery P/N | Lumens (Emergency) | Dimensions (mm) | | | | |
|--|------------------|-------------------|---------------------|-------------|--------------------|-----------------|-----|----|-----|----|
| | | | | | | A | B | C | D | E |
| DALI | ETSLED/NM3IP65DA | Non-Maintained | 6V, 4.5Ah Ni-Cd | 70157 | 2 X 188 | 296 | 287 | 73 | 185 | 74 |
| Alternative Systems Available: Specification Sheets Available Upon Request | | | | | | | | | | |
| DALI Wireless | ZETSLNM3IP65DAW | Non-Maintained | 6.4V, 3.8Ah LiFePO4 | 70257 | 2 X 175 | 296 | 287 | 73 | 185 | 74 |
| Standalone | ETSLED/NM3/IP65 | Non-Maintained | 3.6V, 6Ah Ni-Cd | 70147 | 2 x 221 | 296 | 287 | 73 | 185 | 74 |
| Self Test | ZETSLNM3IP65ST | Non-Maintained | 6V, 4.5Ah Ni-Cd | 70157 | 2 x 188 | 296 | 287 | 73 | 185 | 74 |