# **EVOLUX 3W**

## COMMERCIAL RANGE

#### **Product Features**

- 3 Watt LED.
- Lamp colour 6500K.
- 111 lumens in emergency.
- Competitively priced, discreet LED downlighter.
- Easy to install and maintain.
- Specifically designed reflector to maximise lumen output.
- IP20 as standard.
- Class I.

#### **Materials**


- Lamp head spun aluminium.
- Charger Body aluminum and flame retardant ABS plastic.
- Battery housing aluminum and flame retardant ABS plastic.
- Batteries (self-contained) 3.6V 1.5A/h Ni-Cd.

#### **Installation notes**

- Suitable for recessed mounting.
- 35mm ceiling cut out.
- Minimum 180mm ceiling void.
- · Dimensions See diagram.
- Weight: 0.3Kg.
- Temperature: 0°C 45°C.



\*Equipment dimensions may vary with different systems.

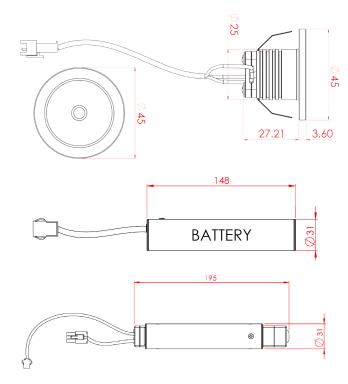





White - RAL 9016

**Alternative colour:** 



Black - RAL 9017 - add /BL to order code

### **System Mode**

**Part Number** 

Self contained. Non-Maintained 3 hour

EVONM3/LED3W

Commercial Range products carry 3 years warranty as standard.

Alternative Warranty option



Add /6Y to Part Number

For Warranty Terms please visit the Ventilux website



Black





Type Approved Safety Regular Production Surveillance

WWW.tuv.com



SALES@VENTILUX.IE
SALES@VENTILUX.CO.UK

