# EXLUX PLUS LED

PREMIUM RANGE

## Product Features

- 2 X Samsung LM561 S4 strips.
- Lamp colour - 6500K.
- Lamp power - 24W Mains.
- 4W emergency.
- LED lamp output: Mains 4014 lumens.
- Emergency 700 lumens.
- Competitively priced, LED EXIT sign.
- Easy to install and maintain.
- IP40 as standard.
- 58m viewing distance.
- Class I.

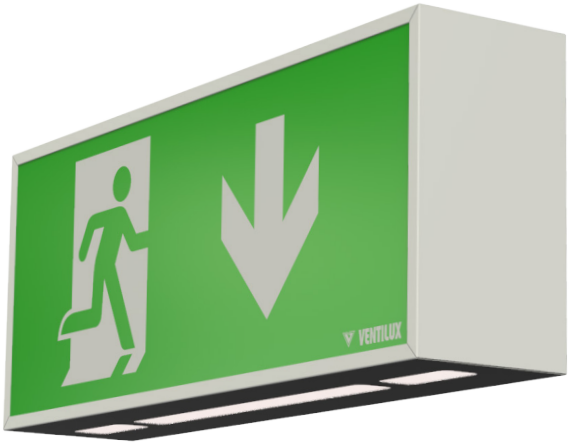


## Materials

- Body - powder coated sheet steel.
- Panel - flame retardant opal ABS plastic.
- Batteries (self-contained) - 4.8V 4A/h Ni-Cd.
- Ni-Mh available upon request.

*Equipment dimensions may vary with different systems.

## Installation notes

- Suitable for wall mounting.
- 20mm cable entry on top of unit.
- 20mm cable entry on rear of unit.
- Dimensions - See diagram.
- Weight: 4.5Kg.
- Temperature range - $0^0$C to $45^0$C.

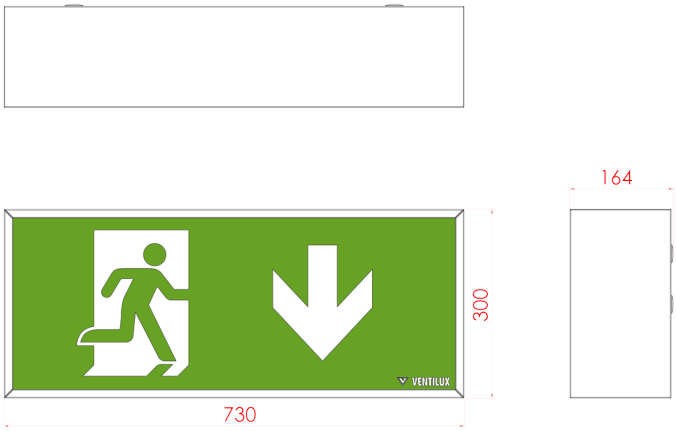


## Colours:

White - RAL 9016

Black - RAL 9017 - add /BL to order code

## System Mode

Self contained. Maintained 3 hour

## Part Number

EXM3/LED/XL

*Choose arrow direction.*




**EXIT sign legend options**

ISO 7010

EDF

*Premium Range products carry **6 years warranty** as standard.*

Alternative **Warranty** option

10 Years Add /10Y to Part Number

For Warranty Terms please visit the Ventilux website

***Also available***

DALI SELF TEST NETCOM5 XP CBS CENTRAL BATTERY SYSTEMS OPW

This specification sheet is a generic specification sheet. Specific specification sheets for Central Battery, Addressable Testing Systems etc are available from Ventilux upon request.