FUSION LED WHITE

COMMERCIAL RANGE

Product Features

- 14 white LEDs.
- Lamp colour - 5000K.
- Lamp power - 0.4W.
- Competitively priced, wall, ceiling, recessed and double sided hanging EXIT.
- Supplied with decals for flexibility on site.
- Easy to install and maintain.
- Maintained 3 hour duration.
- IP20 as standard.
- 25m viewing distance.
- Class I.

Materials

- Body - aluminum.
- Ceiling plate - steel, powder coated.
- Panel - flame retardant acrylic.
- Legend - flame retardant PVC.
- Batteries (self-contained) - 3.6V 800mAh Ni-Cd.

Ceiling hanging blade variant.

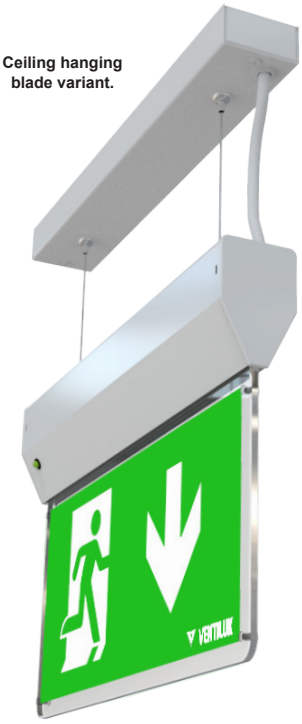

Possible wall and side-wall mounting options.

Brackets and screws provided as standard.

Side-wall mounted variant.

Recessed variant.

TUV Certified

TÜVRheinland CERTIFIED

Type Approved
Safety
Regular Production Surveillance

www.tuv.com
ID 1111229255

FUSION LED

COMMERCIAL RANGE

Installation notes

- Suitable for ceiling mounting.
- Suitable for wall mounting - bracket provided.
- Suitable for side wall mounting - bracket provided.
- Suitable for hanging blade mounting.
- Suitable for recessed mounting - recessing trim provided.
- Hanging blade suspension cable allows 1000mm drop.
- 20mm cable entry on ceiling bracket.
- Dimensions - See diagrams.
- Weight: 1.6Kg.
- Temperature range - 0°C to 45°C.

Colours:

- White - RAL 9016
- Black - RAL 9017
- Brushed chrome

EXIT sign legend options

ISO 7010



EDF

Hanging blade version

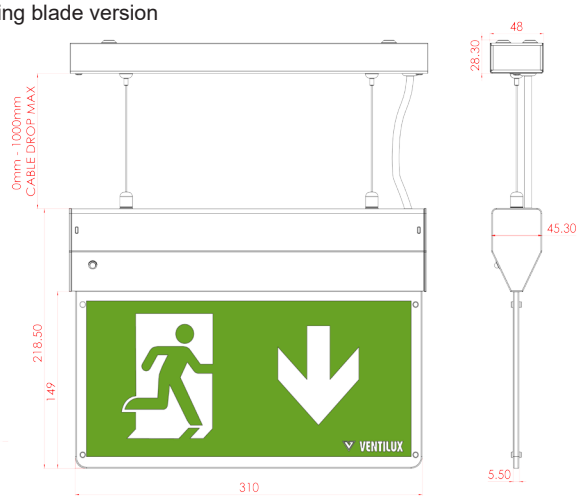

Recessed version

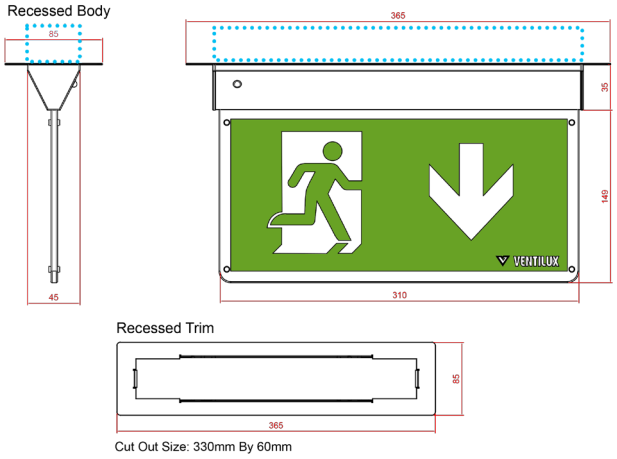

Wall mounted version

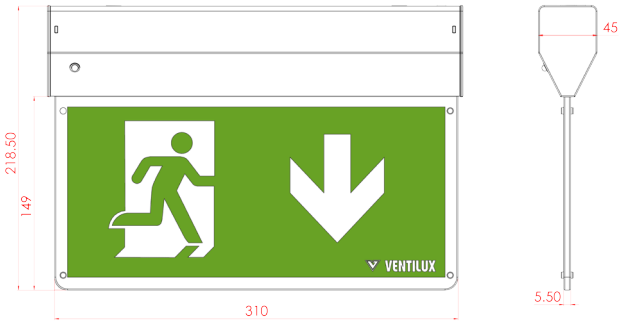

Side wall mounted version

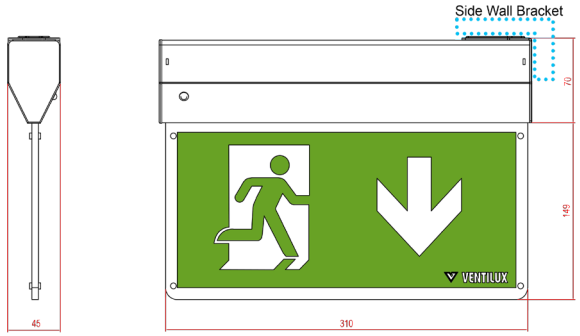

System Mode / Part Number

System Mode	Part Number
Maintained 3 hour - white	FSM3/LED/WH
Maintained 3 hour - black	FSM3/LED/BL
Maintained 3 hour - brushed chrome	FSM3/LED/BCH

***Commercial Range** products carry **3 years warranty** as standard.*

Alternative **Warranty** option — 6 Years — Add /6Y to Part Number

For Warranty Terms please visit the Ventilux website

TUV Certified

TÜVRheinland CERTIFIED

Type Approved
Safety
Regular Production Surveillance

www.tuv.com
ID 1111229255