
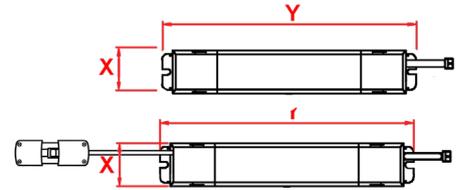


HALO Gen 2

Recessed Downlight

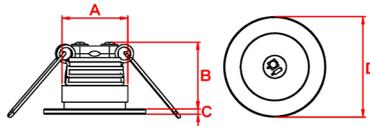

230 Lumens	3 Watts	6000K	Recessed Mounting
LiFePO4 Battery	Class II	IP 40	8Y Warranty

Materials

Lamp Head: Spun Aluminium
 Remote Pack: Flame Retardant ABS

Standard Colour: White - RAL 9016
 Alternative Colours Available Upon Request

Warranty

Standard Warranty: 8 Years
 Alternative Warranty: 10 Years
 Add /10Y to Order Code

Order Code	HA2NM3/LED
Mode of operation	Non-Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	2VA, $I_{nom} = 8mA$ (Full Battery)
Battery type	Rechargeable LiFePO4 Battery 6.4V 1.5Ah
Battery low voltage cut off	5.4V DC
Battery discharge current @ 6.4V DC	0.32A
Lamp	3W
Lamp colour	6000K
Lamp lumen level in emergency	230 lm
Nominal lamp voltage	$V_{rated} = 3V$ DC
Nominal lamp current	$I_{rated} = 0.53A$ CC
Nominal lamp power	$P_{rated} = 2W$
Maximum output voltage with no lamp connected	U-OUT = 10VDC
Ingress Protection	IP40
Cut-Out	38mm Cut-Out
Minimum Ceiling Void (From top of Ceiling Surface)	200mm Ceiling Void
Maximum Ceiling Surface Thickness	18mm
Cable entry	Recessed Pack
Luminaire class	Class II
Product Weight	0.50 Kg
Packaging Weight	0.051 Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)					
						A	B	C	D	X	Y
Standalone	HA2NM3/LED	Non-Maintained	6.4V, 1.5Ah LiFePO4	70267	230	29	31	2.4	45	28	196
Alternative Systems Available: Specification Sheets Available Upon Request											
DALI*	HA2NM3/LED/DA	Non-Maintained	3.2V, 3.6Ah LiFePO4	70268	230	29	31	2.4	45	36	196
Central Battery*	ZHALED3W230S	Slave	-	-	300	29	31	2.4	45	50	220
DALI Central Battery*	ZHALED3W230SDA	Slave	-	-	300	29	31	2.4	45	56	200

Photometrics

*Please Note: The Remote Pack will not fit through 38mm Cut-out. Ensure Alternative Access into the Ceiling Void is Available.

Mounting Height	Lighting level directly under Luminaire (Lux)	Luminaire Spacing (Metres)			
		Escape Route		Open Plan	
		1.0lx	1.0lx	0.5lx	0.5lx
2.5m	43.77	3.0	6.8	3.4	7.7
2.7m	37.53	3.2	7.0	3.5	8.1
3m	30.40	3.4	7.6	3.8	8.7
4m	17.11	4.1	9.2	4.6	10.2
6m	7.60	5.4	12.1	6.1	13.5
8m	4.28	6.0	14.7	7.3	16.5
10m	2.74	5.8	16.5	8.2	19.2

