


MULTILUX BLADE

PREMIUM RANGE

Product Features

- Panel - 22 white SAMSUNG LEDs.
- Down lighter - 10 white SAMSUNG LEDs.
- Aesthetically pleasing, single/double sided, wall, ceiling mounted, recessed hanging panel EXIT luminaire.
- Easy to install and maintain.
- Supplied with  decals for flexibility on site.
- Built-in downlighter which is photometrically tested (70 lumens).
- IP40 as standard.
- 25m viewing distance.
- Class I.

Materials

- Body - flame retardant ABS.
- Panel - flame retardant acrylic.
- Decal - flame retardant PVC.
- Batteries (self-contained) - 4.8V 1.3A/h Ni-Mh.

Installation notes

- Suitable for ceiling mounting.
- (Side wall mounted/ceiling bracket and recessing kit available upon request.)
- Recessing kit cutout dimensions 370x90mm.
- Hanging blade suspension cable allows 800mm drop.
- 20mm cable entry on ceiling bracket.
- Dimensions - See diagram. (Retracted panel).
- Weight: 1.3Kg.
- Temperature range - 0°C to 45°C.

Standard colour:  White - RAL 9016

Alternative colour:  Black - RAL 9017 - add /BL to order code

Other RAL colours available upon request

System Mode **Part Number**

Maintained 3 hour MXBM3/LED

Premium Range products carry 6 years warranty as standard.

Alternative **Warranty** option 10 Years Add /10Y to Part Number

For Warranty Terms please visit the Ventilux website

Also available



recessed
(Bracket available separately)



double sided
hanging




double sided
side wall mounted
(Bracket available separately)



double sided
ceiling mounted

*Equipment dimensions may vary with different systems.

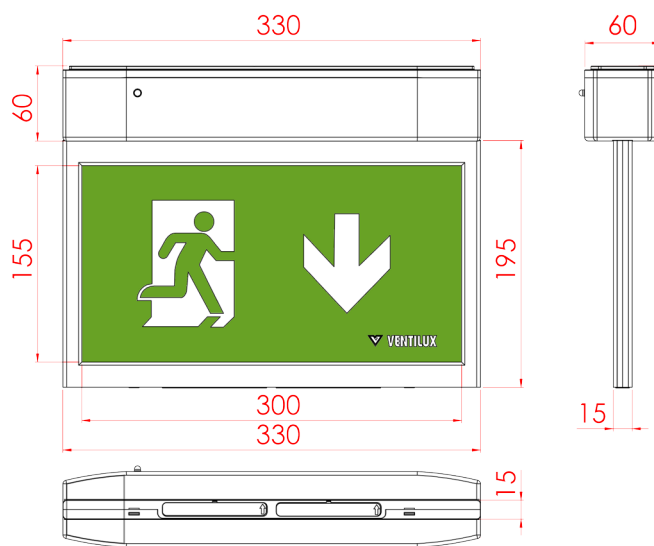

EXIT sign legend options



ISO 7010

*Special legends available upon request.



This specification sheet is a generic specification sheet. Specific specification sheets for Central Battery, Addressable Testing Systems etc are available from Ventilux upon request.