

OPTILENS

PREMIUM RANGE

Product Features

- CREE XP-G3 LED.
- Lamp colour - 6000K.
- Lamp power - 3.0 Watt.
- 300 lumens in emergency.
- Easy to install and maintain.
- Suitable for recessed ceiling mounting.
- Supplied with both asymmetrical and symmetrical lens.
- IP40 as standard.
- Class I.






Materials

- Lamp head - flame retardant polycarbonate plastic.
- Remote bag - silicone coated fibre glass bag.
- Batteries (self-contained) - 4.8V 4.5A/h Ni-Cd.
- Ni-Mh available upon request.

*Equipment dimensions may vary with different systems.

Installation notes

- 38mm ceiling cut out.
- 220mm ceiling void compatible.
- 3 way shrouded plug/socket mains connection.
- Dimensions - See diagram.
- Weight: 0.9Kg.
- Suitable for temp range - 0°C to 45°C.

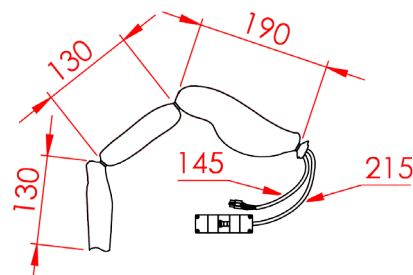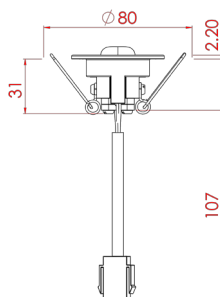

Colours: White - RAL 9016
 Black - RAL 9017

System Mode

Self contained. Non-Maintained 3 hour

Part Number

OLNM3/LED/3W/6Y

Premium Range products carry **6 years warranty** as standard.

Alternative **Warranty** options

3 Years	/3Y
10 Years	/10Y

For Warranty Terms please visit the Ventilux website

Also available



This specification sheet is a generic specification sheet. Specific specification sheets for Central Battery, Addressable Testing Systems etc are available from Ventilux upon request.