

# RECESSED STYLUX LED

PREMIUM RANGE

## Product Features

- 10 high output SAMSUNG white LEDs.
- Lamp colour - 5000K.
- Lamp power - 1W.
- 120 lumens in emergency.
- Competitively priced, recessed LED EXIT sign.
- Easy to install and maintain.
- Removable internal gear tray.
- IP40 as standard.
- 28m viewing distance.
- Class I.




## Materials

- Housing - powder coated sheet steel.
- Panel - flame retardant clear acrylic plastic.
- Batteries (self-contained) - 4.8V 1.3A/h Ni-Mh.

\*Equipment dimensions may vary with different systems.

## Installation notes

- Suitable for ceiling mounting.
- 20mm cable entry on side of unit.
- 20mm cable entry on rear of unit.
- Dimensions - See diagram.
- Dimensions of cut out 360mm L x 96mm D.
- Minimum ceiling void depth: 110mm.
- Weight: 2.1Kg.
- Temperature range - 0°C to 45°C.

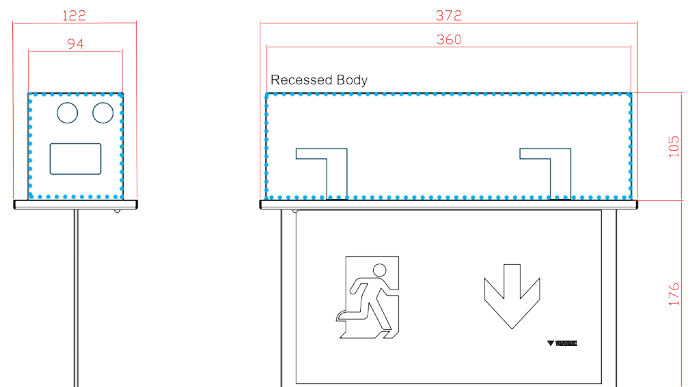

## Colours:

- White - RAL 9016 - add /WH to order code
- Black - RAL 9017 - add /BL to order
- Brass - add /PB to order code
- Chrome - add /CH to order code

Black



Brass



Chrome



## System Mode

Self contained. Maintained 3 hour

## Part Number

RSTM3/LED/6Y

Choose arrow direction.

01 - Left, 02 - Down, 03 - Right or 04 - Up.

Premium Range products carry 6 years warranty as standard.

Alternative Warranty options

For Warranty Terms please visit the Ventilux website

3 Years	/3Y
10 Years	/10Y

## EXIT sign legend options



ISO 7010



EDF

Recessed section



Also available



This specification sheet is a generic specification sheet. Specific specification sheets for Central Battery, Addressable Testing Systems etc are available from Ventilux upon request.