

Product Features

- 12 high output white LEDs on panel.
- 3 high output white LEDs on downlighter.
- Lamp colour - 5000K.
- Lamp power - 0.6W.
- 70 lumens in emergency.
- Competitively priced, LED EXIT sign.
- Easy to install and maintain.
- Integrated LED down-lighter.
- Supplied with ISO 01, 02, 03 and 04 decals for flexibility on site.
- IP20 as standard.
- 30m viewing distance.
- Class I.




*Equipment dimensions may vary with different systems.

Materials

- Body - flame retardant ABS.
- Panel - flame retardant acrylic.
- Legend - flame retardant PVC.
- Batteries (self-contained) - 3.6V 1.8Ah Ni-Cd.

Installation notes

- Suitable for wall mounting.
- 20mm cable entry on rear of unit.
- Dimensions - See diagram.
- Weight: 1.1Kg.
- Temperature range - 0°C to 45°C.

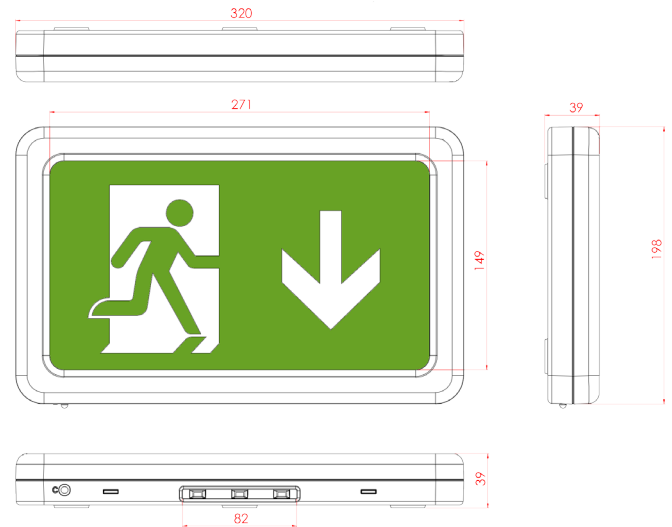

Colours:

- White - RAL 9016
- Black - RAL 9017


System Mode

- Self contained. Maintained 3 hour White
- Self contained. Maintained 3 hour Black

Part Number

- VLM3/LED
- VLM3/LED/BL

EXIT sign legend options



ISO 7010

EDF

TUV Certified



Type Approved Safety
Regular Production Surveillance

www.tuv.com
ID 1111228857

Commercial Range products carry 3 years warranty as standard.

For Warranty Terms please visit the Ventilux website