

VISOR 120

PREMIUM RANGE

Product Features

- 8 high output SAMSUNG white LEDs.
- Lamp colour - 5000K.
- Lamp power - 1W.
- 120 lumens in emergency.
- Competitively priced, LED bulkhead.
- Easy to install and maintain.
- Hinged gear tray.
- IP65 as standard.
- Class I.

Materials


- Body - flame retardant ABS plastic.
- Diffuser - flame retardant clear ABS plastic.
- Gear Tray - powder coated sheet steel.
- Batteries (self-contained) - 4.8V 1.3A/h Ni-Mh.

Installation notes

- Suitable for wall mounting.
- Suitable for ceiling mounting.
- 20mm cable entry on side of unit.
- 20mm cable entry on rear of unit.
- Recessing kit available.
- Dimensions - See diagram.
- Weight: 0.8Kg.
- Temperature range - 0°C to 45°C.



*Equipment dimensions may vary with different systems.

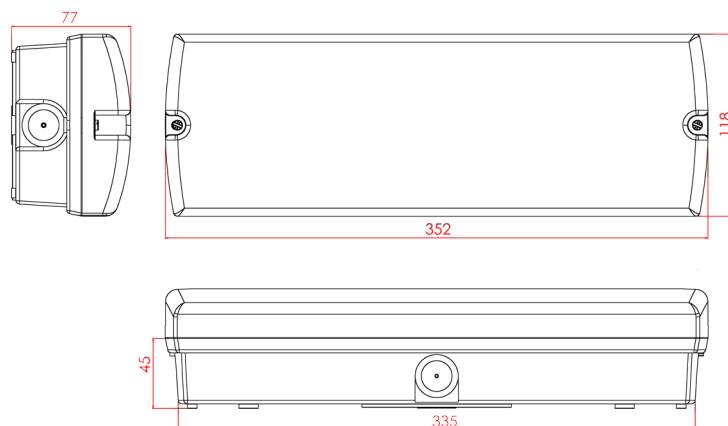

Standard colour:



White - RAL 9016

System Mode

Part Number

Self contained. Maintained 3 hour VIM3/LED120

Self contained. Non-maintained 3 hour VINM3/LED120

Premium Range products carry **6 years warranty** as standard.

Alternative **Warranty** option

10 Years

Add /10Y to Part Number

For Warranty Terms please visit the Ventilux website

Also available



This specification sheet is a generic specification sheet.
Specific specification sheets for Central Battery, Addressable Testing
Systems etc are available from Ventilux upon request.