


# Vanguard

## Wall Mounted (WBK) DALI Exit

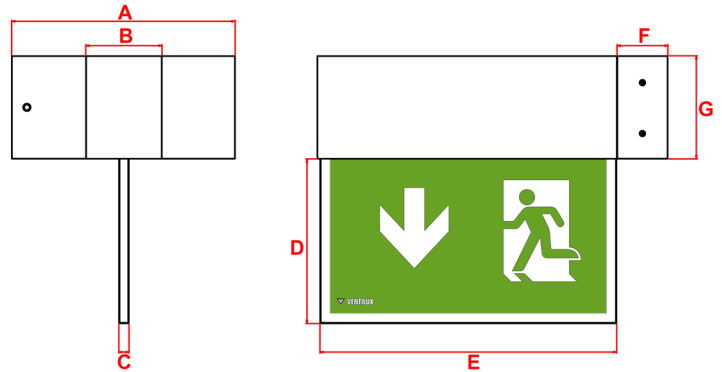

IP 40	6Y Warranty	Stainless Steel	Wall Mounted
32m Viewing Distance	3.3 Kg	NiMh Battery	Class I

### Materials

Housing: Stainless Steel

Panel Legend: Acrylic

Standard Colour: Stainless Steel

Alternative Colours available upon request

### Warranty

Standard Warranty:

6 Years

Alternative Warranty:

10 Years

Add /10Y to order code

Order Code	ZVGD3M3LWBKDALI
Mode of Operation	Maintained DALI
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	7.2VA
Battery low voltage cut off	3.0Vdc
Battery discharge current @ 3.6Vdc	0.485A
Battery	Rechargeable 3.6V 4Ah NiMh
Lamp	8 x High Powered White Samsung LEDs
Lamp Life	L <sub>80</sub> B <sub>50</sub> 80000 Hours
Nominal lamp current	I <sub>rated</sub> 0.35A CC
Nominal lamp power	P <sub>rated</sub> = 1W
Cable entry	20mm Rear entry
Luminaire class	Class I
Weight	2.75 kg (no panel) 3.3 kg (c/w Panel fitted)
Packaging Weight	0.28 kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)						
						A	B	C	D	E	F	G
DALI	ZVGD3M3LWBKDALI	Maintained	3.6V 4Ah NiMh	70232	32 Metres	220	75	10	162	290	50	101.5
Alternative Systems Available:												
Standalone	VGD3M3/LED/WBK	Maintained	4.8V 1.3Ah NiMh	70229	32 Metres	220	75	10	162	290	50	101.5
Central Battery	ZVGDLED240SWBK	Slave	n/a	n/a	32 Metres	220	75	10	162	290	50	101.5


### Legends (Ordered Separately)



Left /Right Arrow (Left one side, Right opposite side)  
PN: LPVGDISO013VL



Down Arrow (both sides)  
PN: LPVGDISO02VL



Up Arrow (both sides)  
PN: LPVGDISO04VL

**Additional options of Printed Panels available. Contact Ventilux for further details.**