
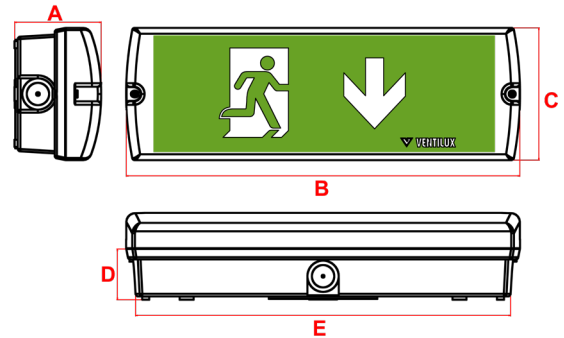


# Visor

## Surface Mounted Exit Sign

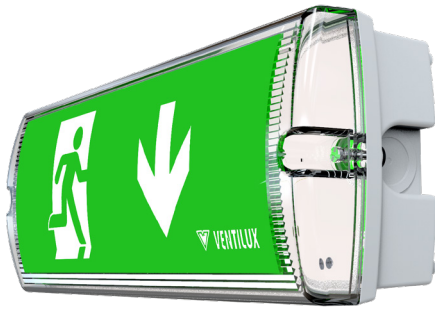

22m Viewing Distance	IP 65	Ni-Cd Battery	Wall and Ceiling Mounting
0.8Kg	6500K	Class I	3Y Warranty

### Materials

Housing:	Polycarbonate
Adhesive Legend:	Polycarbonate
Standard Colour:	White - RAL 9016

### Warranty

Standard Warranty:	3 Years
Alternative Warranty:	6 Years
	Add /6Y Years to Order Code

Order Code	VIM3/LED/**
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	9.5VA, $I_{nom} = 0.04A$ (Full Battery)
Battery type	Rechargeable high temp Ni-Cd 3.6V 1.5Ah
Battery low voltage cut off	3V DC
Battery discharge current @ 3.6V DC	0.3A
Lamp	1W LED
Lamp colour	6500K
Lumen Level in emergency	130lm
Lamp Lifetime	$L_{80} B_{50}$
Nominal lamp voltage	$V_{rated} = 2.9V$ DC
Nominal lamp current @ 3.6V	$I_{rated} = 0.29A$
Nominal lamp power @ 3.6V	$P_{rated} = 0.8W$
Maximum output voltage with no lamp connected	U-OUT = 6V AC
Ingress protection	IP65
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	0.8 Kg
Packaging Weight	0.093Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)				
						A	B	C	D	E
Standalone	VIM3/LED/**	Maintained	3.6V, 1.5Ah Ni-Cd	70149	22 Metres	77	352	118	45	335

Available Accessories			
Order Code	Description	Material	Cutout (mm)
VI/SRK	Semi-Recessing Kit	Painted Steel	350 x 120


### Alternative Legends




Replace \*\* with 01 for  
application of Left Arrow  
PN: 01731



Replace \*\* with 02 for  
application of Down Arrow  
PN: 01752



Replace \*\* with 03 for  
application of Right Arrow  
PN: 01773



Replace \*\* with 04 for  
application of Up Arrow  
PN: 01794