


# Visor Pro

## Double-Sided Surface Mounted Exit

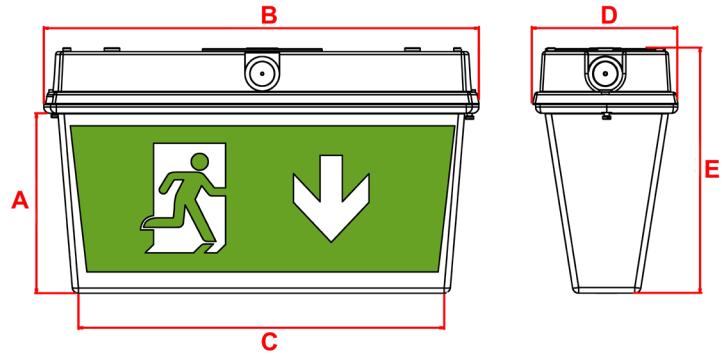

28m Viewing Distance	IP 65	Ni-Mh Battery	Ceiling Mounting
1 Kg	6500K	Class I	6Y Warranty

### Materials

Housing: Polycarbonate  
 Adhesive Legend: Polycarbonate  
 Standard Colour: White - RAL 9016

### Warranty

Standard Warranty: 6 Years  
 Alternative Warranty: 10 Years  
 Add /10Y Years to Order Code

Order Code	VIPROM3/LED/2**
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	5VA
Battery type	Rechargeable high temp Ni-Mh 4.8V 1.3Ah
Battery low voltage cut off	4V DC
Battery discharge current @ 4.8V DC	0.28A
Lamp Lifetime	$L_{80} B_{50}$ 50000 Hours
Lamp	1W LED
Lamp colour	6500K
Lumen Level in emergency	188lm
Nominal lamp voltage	$V_{rated} = 3V DC$
Nominal lamp current	$I_{rated} = 0.35A$
Nominal lamp power	$P_{rated} = 1W$
Maximum output voltage with no lamp connected	U-OUT = 6V AC
Ingress protection	IP65
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1 Kg
Packaging Weight	0.14Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)				
						A	B	C	D	E
Standalone	VIPROM3/LED/2**	Maintained	4.8V, 1.3Ah Ni-Mh	70229	28 Metres	146	353	297	118	199
Alternative Systems Available: Specification Sheets Available Upon Request										
Central Battery	ZVIPROLED230S2**	Slave	-	-	28 Metres	146	353	297	118	199
DALI	VIPROM3/LED/2**DA	Maintained	3.6V, 4.5Ah Ni-Cd	70151	28 Metres	146	353	297	118	199
DALI Central Battery	ZVIPROLED230S2**DA	Slave	-	-	28 Metres	146	353	297	118	199

### Legends

Available Accessories			
Order Code	Description	Material	Cutout (mm)
VI/SRK	Semi-Recessing Kit	Painted Steel	350 x 120



Replace \*\* with 02 for application of Down Arrows (PN: 01094)



Replace \*\* with 013 for application of Left Arrow (PN: 01093) on one side and Right Arrow (PN:01095) on the opposite side



Replace \*\* with 04 for application of Up Arrows (PN: 01096)