
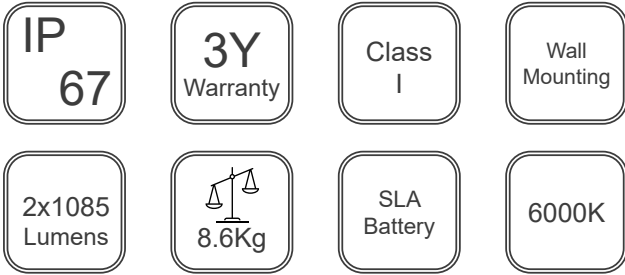


WTL 2X18W

IP67 Emergency Twinspot

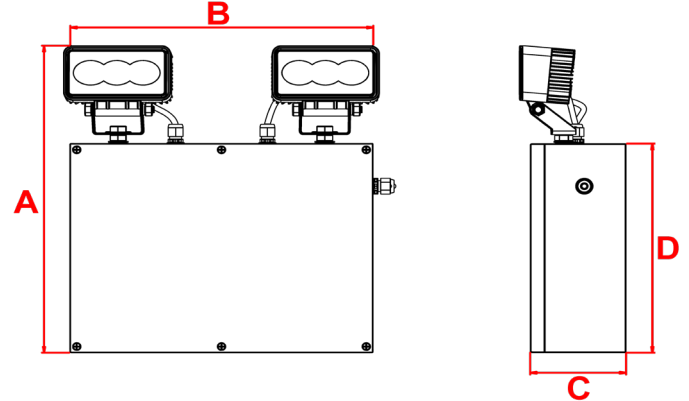

Order Code	WTL2X18WLED/NM3
Mode of operation	Non-maintained
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Battery charger	Fully automatic, current limited constant voltage
Lamp	2 x LED lamp heads total wattage 36 watts Each LED lamp contains 2 high power LEDs
Lamp lumen level emergency	1085 lumens for each lamp head
Battery	Rechargeable sealed lead acid battery 12V 7.0Ah
Degree of protection	IP67
Power consumption	20VA for 24 hours upon initial charge <9VA once charged
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Emergency duration	3 hours
Weight	8.6 kg
Packaging Weight	0.235 kg
Standards	EN 60598.2.22 EN61347-2-7 EN55015
Environment	0°C to 30°C up to 80% relative humidity

Materials

Housing: Polycarbonate
Standard Colour: Grey RAL 7032

Warranty

Standard Warranty: 3 Years
Alternative Warranty: 6 Years
Add /6Y to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)				
						A	B	C	D	
Standalone	WTL2X18WLED/NM3	Non-Maintained	12V 7Ah SLA (Qty:2)	70162	2 x 1085	347	316	100	237	
Alternative Systems Available:										
Central Battery	ZWTL2X18WL230S	Slave	n/a	n/a	2 x 1085	347	316	100	237	