
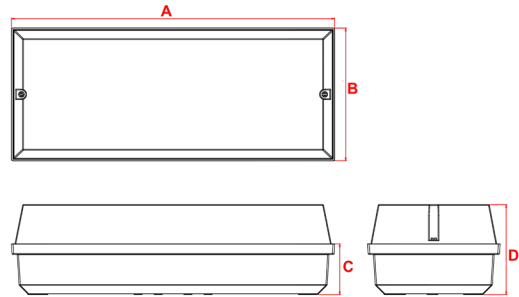


# Weatherproof Cold Room

## IP65 Cold Room Bulkhead

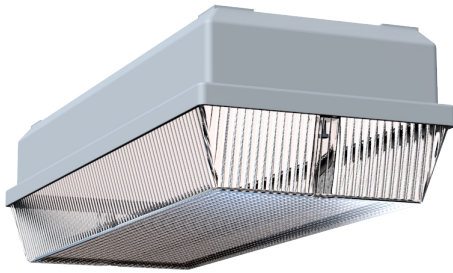

<b>420</b> Lumens	<b>3</b> Watt	<b>6000K</b>	Wall and Ceiling Mounting
Class <b>I</b>	<b>IP</b> <b>65</b>	<b>IK</b> <b>10</b>	<b>6Y</b> Warranty

<b>Order Code</b>	<b>WPM3/LED3W/PCR</b>
Mode of operation	Maintained - not switchable
Emergency duration	3 hours
Input voltage	230/240V 50/60Hz
Power consumption	7VA, Inom.=30mA
Battery Type	Rechargeable low temperature Ni-Cd 4.8V 4.5A/h suitable for use at -20°C to +20°C
Battery low voltage cut off	3V
Nominal battery discharge current	485mA
Lamp	3x1 watt WHITE CREE LED - 50000 hr
Lamp colour	Cool white 6000K
Lumen level	420 lm
Ingress Protection	IP65
Impact Resistance	IK10
Cable Entry	20mm on sides and Rear
Luminaire class	Class I
Product Weight	1.4Kg
Packaging Weight	0.17Kg
Standards	EN 60598-2-22, EN 61347-2-7, EN 55015
Environment	-20°C to +20°C - Not suitable for ambient temperatures greater than 20°C

### Materials

Housing: Polycarbonate  
 Standard Colour: White - RAL 9016  
 Alternative Colours Available Upon Request

### Warranty

Standard Warranty: 6 Years  
 Alternative Warranty: 10 Years  
 Add /10 Years to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
Standalone	WPM3/LED3W/PCR	Maintained	4.8V, 4.5Ah Ni-Cd	70123	420	370	152	58	102

Available Accessories					
Order Code	Description	Material	Cutout (mm)	Dimensions(mm)	
WP/SRK	Semi-Recessing Kit	Powder Coated Steel	360 x 143	398	179

### Photometrics

Mounting Height	Lighting level directly under Luminaire	↔		↔		↔		↔		↔	
		0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
<b>2m</b>	<b>37.49</b>	6.3	5.2	15.0	12.5	14.0	11.6	13.0	10.7	5.4	4.4
<b>2.5m</b>	<b>24.03</b>	6.9	5.7	16.7	13.8	15.5	12.9	14.3	11.9	5.9	4.9
<b>3m</b>	<b>16.70</b>	7.5	6.1	18.2	14.9	16.9	13.9	15.5	12.9	6.4	5.1
<b>4m</b>	<b>9.40</b>	8.4	6.6	20.6	16.8	19.2	15.6	17.7	14.4	7.2	5.2
<b>6m</b>	<b>4.18</b>	9.2	5.9	24.3	18.4	22.4	16.8	20.5	15.2	7.6	5.8
<b>8m</b>	<b>2.35</b>	8.2	5.5	26.4	16.4	23.7	16.4	20.9	16.4	8.2	5.6
<b>10m</b>	<b>1.51</b>	8.2	4.9	22.1	16.3	22.4	16.3	22.6	16.2	8.1	4.4

