
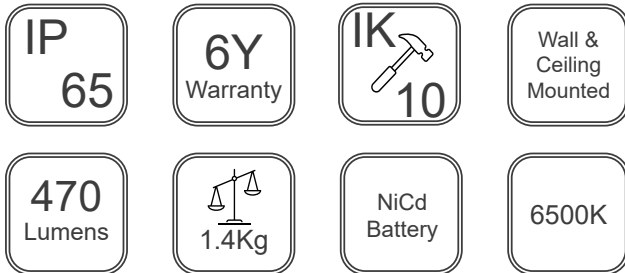
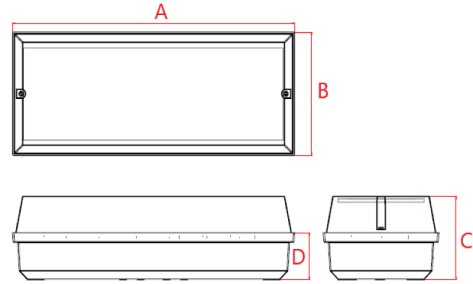


Weather Proof

3W Emergency Bulkhead

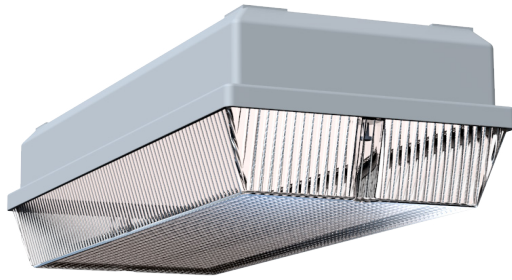

Materials

Housing: Polycarbonate (Base)
Clear Polycarbonate (Diffuser)
Geartray: Painted sheet steel

Standard Colour: White RAL 9016
Alternative Colours: Available on request

Warranty

Standard Warranty: 6 Years
Alternative Warranty: 10 Years
Add /10Y to Order Code


Order Code	WPNM3/LED3W/P
Mode of operation	Non-Maintained
Emergency duration	3 Hours
Input voltage	230-240V AC
Power consumption	3.5VA
Battery type	4.8V 4.5Ah NiCd
Battery low voltage cut off	4V
Battery discharge current @ 4.8V DC	0.78A
Lamp	15 Medium Power CREE LED's
Lamp colour	6500K
Lamp lumen level in emergency	470
Nominal lamp voltage	9V
Nominal lamp current	0.35A CC
Nominal lamp power	3 Watts
Maximum output voltage with no lamp connected	U-OUT=13.5V DC
Ingress Protection	IP65
Impact Resistance	IK10
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1.4 Kg
Packaging Weight	0.17 Kg
Standards	EN61347-2-7, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
Standalone	WPNM3/LED3W/P	Non-Maintained	4.8V 4.5Ah NiCd	70123	470	368	150	102	58
Alternative Systems Available:									
Standalone	WPM3/LED3W/P	Maintained	4.8V 4.5Ah NiCd	70123	470	368	150	102	58
DALI	WPNM3/LED/3WDA	Non-Maintained	6V 4.5Ah NiCd	70153	350	368	150	102	58
Central Battery	ZWPLED3W230S	Slave	n/a	n/a	470	368	150	102	58
Dali Wireless	ZWPNM3LED5WPAW	Non-Maintained	6.4V 6.4Ah LiFePO4	70258	800	368	150	102	58

Available Accessories					
Order Code	Description	Material	Cutout (mm)	Dimensions(mm)	
WP/SRK	Semi-Recessing Kit	Powder Coated Steel	360 x 143	398	179

Photometrics

Mounting Height	Lighting level directly under Luminaire	↔		↔		↔		↔		↔	
		0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
2m	41.96	6.4	5.3	15.5	12.9	14.5	11.9	13.5	11.0	5.5	4.6
2.5m	26.89	7.1	5.9	17.2	14.3	16.0	13.3	14.8	12.2	6.1	5.0
3m	18.69	7.7	6.3	18.7	15.5	17.4	14.4	16.0	13.3	6.6	5.3
4m	10.52	8.7	7.0	21.3	17.4	19.8	16.1	18.3	14.9	7.4	5.4
6m	4.68	9.9	6.2	25.1	19.7	23.3	17.7	21.5	15.7	7.8	6.1
8m	2.36	8.5	6.0	28.0	17.0	24.8	17.1	21.6	17.2	8.6	6.0
10m	1.69	8.7	5.3	22.8	17.5	23.2	17.3	23.6	17.2	8.6	5.1

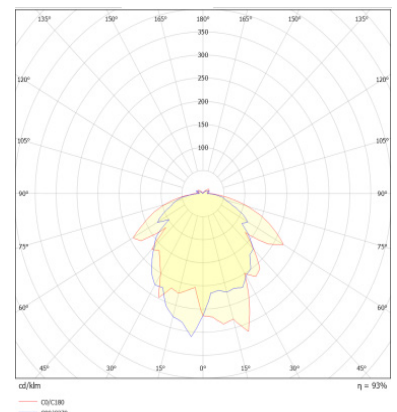

www.ventilux.com ● sales@ventilux.ie ● sales@ventilux.co.uk (UK Enquiries Only) ● SS2-011-2

We adopt a policy of continuous product and services improvement and we reserve the right to vary details without prior notice
For Warranty Terms please visit the Ventilux website