
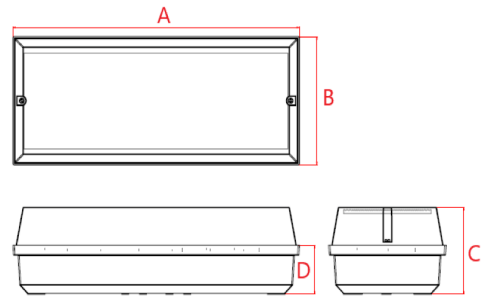


# Weather Proof

## IP65 3W DALI Emergency Bulkhead

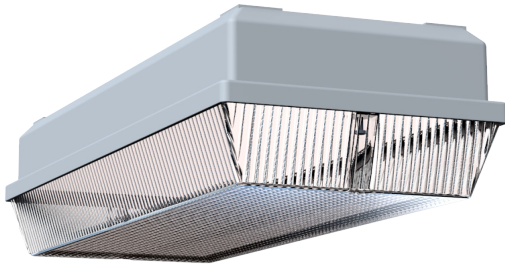

## Materials

Housing: Polycarbonate (Base)  
Clear Polycarbonate (Diffuser)  
Geartray: Painted sheet steel

Standard Colour: White RAL 9016  
Alternative Colours: Available on request

## Warranty

Standard Warranty: 6 Years  
Alternative Warranty: 10 Years  
Add /10Y to Order Code


|                                               |                                                                 |
|-----------------------------------------------|-----------------------------------------------------------------|
| Order Code                                    | WPNM3/LED3W/DA                                                  |
| Mode of operation                             | Non-Maintained DALI                                             |
| Emergency duration                            | 3 Hours                                                         |
| Input voltage                                 | 230-240V AC                                                     |
| Power consumption                             | 8VA                                                             |
| Battery type                                  | 6V 4.5Ah NiCd                                                   |
| Battery low voltage cut off                   | 5V                                                              |
| Battery discharge current @ 6V DC             | 0.85A                                                           |
| Lamp                                          | 15 Medium Power CREE LED's                                      |
| Lamp colour                                   | 6500K                                                           |
| Lamp lumen level in emergency                 | 350                                                             |
| Nominal lamp voltage                          | 3V                                                              |
| Nominal lamp current                          | 1A                                                              |
| Nominal lamp power                            | 3 Watts                                                         |
| Maximum output voltage with no lamp connected | U-OUT=10V DC                                                    |
| Ingress Protection                            | IP65                                                            |
| Impact Resistance                             | IK10                                                            |
| Cable entry                                   | To be Drilled and Glanded on installation (Glands not included) |
| Luminaire class                               | Class I                                                         |
| Product Weight                                | 1.6 Kg                                                          |
| Packaging Weight                              | 0.17 Kg                                                         |
| Standards                                     | EN61347-2-7, EN 60598-2-22, EN 55015                            |
| Environment                                   | 0°C to 45°C up to 80% relative humidity                         |

| System                         | Order Code     | Mode of Operation | Battery            | Battery P/N | Lumens (Emergency) | Dimensions (mm) |     |     |    |
|--------------------------------|----------------|-------------------|--------------------|-------------|--------------------|-----------------|-----|-----|----|
|                                |                |                   |                    |             |                    | A               | B   | C   | D  |
| DALI                           | WPNM3/LED3W/DA | Non-Maintained    | 6V 4.5Ah NiCd      | 70153       | 350                | 368             | 150 | 102 | 58 |
| Alternative Systems Available: |                |                   |                    |             |                    |                 |     |     |    |
| Self-Contained                 | WPM3/LED3W/P   | Maintained        | 4.8V 4.5Ah NiCd    | 70123       | 470                | 368             | 150 | 102 | 58 |
| Self-Contained                 | WPNM3/LED/3W/P | Non-Maintained    | 4.8V 4.5Ah NiCd    | 70123       | 470                | 368             | 150 | 102 | 58 |
| Central Battery                | ZWPLED230S     | Slave             | n/a                | n/a         | 470                | 368             | 150 | 102 | 58 |
| Dali Wireless                  | ZWPNM3LED5WPAW | Non-Maintained    | 6.4V 6.4Ah LiFePO4 | 70258       | 800                | 368             | 150 | 102 | 58 |

| Available Accessories |                    |               |             |                |     |
|-----------------------|--------------------|---------------|-------------|----------------|-----|
| Order Code            | Description        | Material      | Cutout (mm) | Dimensions(mm) |     |
| WP/SRK                | Semi-Recessing Kit | Painted Steel | 360 x 143   | 398            | 179 |

## Photometrics

| Mounting Height | Lighting level directly under Luminaire | ↔   |     | ↔    |      | ↔    |      | ↔    |      | ↔   |     |
|-----------------|-----------------------------------------|-----|-----|------|------|------|------|------|------|-----|-----|
|                 |                                         | 0.5 | 1.0 | 0.5  | 1.0  | 0.5  | 1.0  | 0.5  | 1.0  | 0.5 | 1.0 |
| 2m              | 31.25                                   | 6.0 | 4.9 | 14.4 | 11.9 | 13.4 | 11.1 | 12.4 | 10.2 | 5.1 | 4.2 |
| 2.5m            | 20.02                                   | 6.6 | 5.4 | 15.9 | 13.1 | 14.8 | 12.2 | 13.6 | 11.3 | 5.7 | 4.6 |
| 3m              | 13.92                                   | 7.1 | 5.8 | 17.3 | 14.2 | 16.0 | 13.2 | 14.8 | 12.2 | 6.1 | 4.5 |
| 4m              | 7.84                                    | 7.9 | 5.8 | 19.6 | 15.9 | 18.2 | 14.5 | 16.8 | 13.1 | 6.6 | 5.0 |
| 6m              | 3.49                                    | 6.9 | 5.3 | 23.0 | 13.8 | 20.5 | 14.1 | 18.0 | 14.3 | 7.2 | 5.3 |
| 8m              | 1.96                                    | 7.6 | 4.6 | 23.5 | 15.2 | 21.7 | 15.1 | 19.8 | 14.9 | 7.5 | 4.8 |
| 10m             | 1.26                                    | 7.2 | 4.0 | 20.9 | 14.4 | 21.0 | 14.5 | 21.0 | 14.6 | 7.3 | 3.2 |

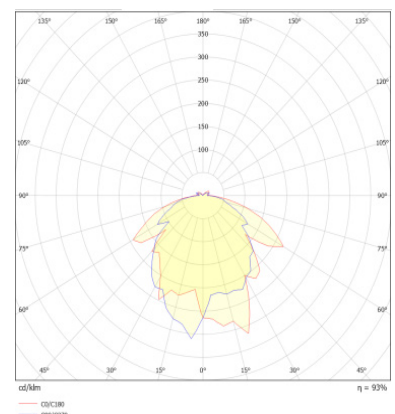

www.ventilux.com ● sales@ventilux.ie ● sales@ventilux.co.uk (UK Enquiries Only) ● SS2-012-2

We adopt a policy of continuous product and services improvement and we reserve the right to vary details without prior notice  
For Warranty Terms please visit the Ventilux website