


Weatherproof Cold Room

IP65 Cold Room Dali Exit Sign

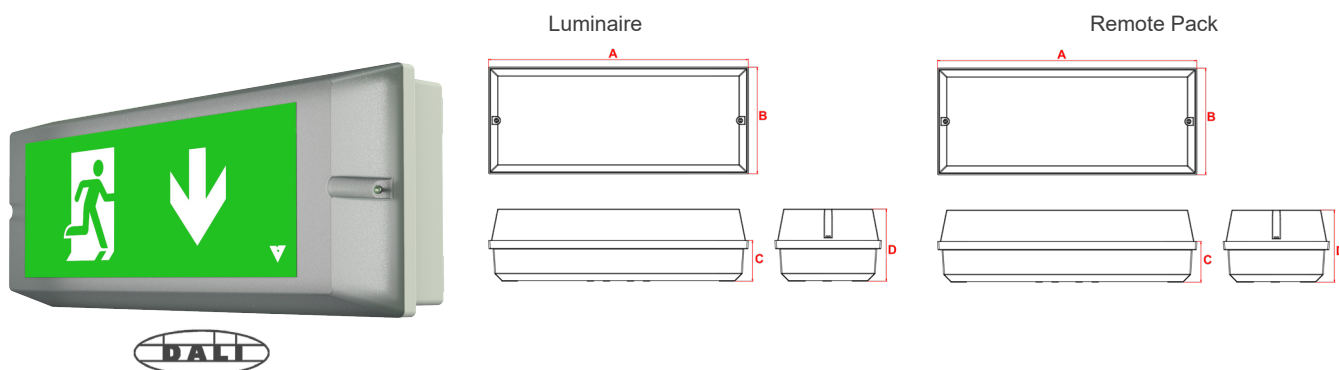

22M Viewing Distance	1 Watt	6500K	Wall Mounting
Class I	IP 65	IK 10	6Y Warranty

Materials

Luminaire Housing: Polycarbonate
Remote Housing: Polycarbonate
Standard Colour: White - RAL 9016
Alternative Colours Available Upon Request


Warranty

Standard Warranty: 6 Years
Alternative Warranty: 10 Years
Add /10 Years to Order Code

Order Code	ZWPM3LED CR**RPDA
Mode of operation	Maintained Dali
Emergency duration	3 hours
Input voltage	230/240V 50/60Hz
Power consumption	7VA, Inom.=30mA
Battery Type	Rechargeable Ni-Cd 3.6V 4.5Ah
Battery low voltage cut off	3V
Nominal battery discharge current	0.485A
Lamp	8 x SM LED Strip Constant Current
Lamp colour	6500K
Lamp Lifetime	L ₈₀ B ₅₀ - 80000Hrs
Ingress Protection	IP65(Luminaire) IP65(Remote Pack)
Impact Resistance	IK10
Cable Entry	20mm on sides and Rear
Luminaire class	Class I
Product Weight	1.2Kg
Packaging Weight	0.17Kg
Standards	EN 60598-2-22, EN 61347-2-7, EN 55015
Environment	-20°C to +20°C - Not suitable for ambient temperatures greater than 20°C

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)			
						A	B	C	D
DALI	ZWPM3LED CR**RPDA	Maintained	3.6V, 4.5Ah Ni-Cd	70151	22 Metres	370	152	58	102

Alternative Legends

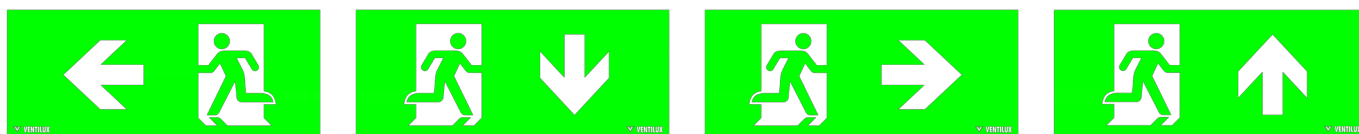

Replace ** with 01 for application of Left Arrow Replace ** with 02 for application of Down Arrow Replace ** with 03 for application of Right Arrow Replace ** with 04 for application of Up Arrow