



# Solaris

## Circular Mains Bulkhead c/w MWS

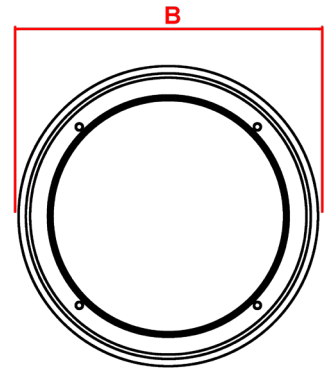

Alternative 'Slim Trim' Available



1500 Lumens	12 Watts	3000K/ 4000K	Wall and Ceiling Mounting
IK 10	Class II	IP 65	MICROWAVE SENSOR

## Materials

Housing:	Polycarbonate
Standard Colour:	White - RAL 9016
Alternative Colours:	Black - RAL 9017 Add <b>/BL</b> to Order Code

## Warranty

Standard Warranty:	3 Years
Alternative Warranty:	6 Years Add <b>/6Y</b> Years to Order Code

Deep Trim supplied as Standard  
Add **/NT** for Slim Trim

Order Code	SR/LED/230/MWS
Mode of operation	Mains
Input voltage	230/240V 50/60Hz
Power consumption	18VA, $I_{nom} = 0.75A$
Lamp	$P_{rated} = 12W$ LED
Lamp colour	3000K (Selectable between 3000K & 4000K using switch on LED plate)
Luminaire lumen level in mains	1500lm
Lamp Lifetime	$L_{80} B_{50}$
Nominal lamp current in mains	0.35A
Maximum output voltage with no lamp connected	U OUT = 60 VDC
Detection Range	10M x 6M
Detection Angle	30° - 150°
Sensitivity Range	10/50/75/100%
Hold-Time Settings	5secs/90secs/5mins/15mins
Ingress protection	IP65
Luminaire class	CLASS II
Product Weight	0.87 kg
Packaging Weight	0.25Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Lumens (Mains)	Dimensions (mm)	
							A	B
Mains c/w MWS	SR/LED/230/MWS	Mains	-	-	-	1500	90	320
Alternative Systems Available: Specification Sheets Available Upon Request								
Standalone c/w MWS	SRM3/LED/MWS	Maintained	6.4V, 1500mAh LiFePO4	70159	274	1500	90	320
Standalone	SRM3/LED	Maintained	6.4V, 1500mAh LiFePO4	70159	274	1500	90	320