



# Solaris

## Circular Mains Bulkhead

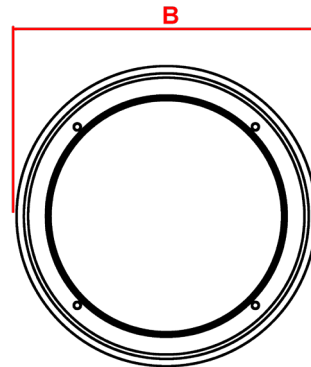

Alternative 'Slim Trim' Available



<b>1500</b> Lumens	<b>12</b> Watts	<b>3000K/ 4000K</b>	Wall and Ceiling Mounting
<b>IK</b> 10	Microwave Sensor Options available	<b>IP</b> <b>65</b>	<b>3Y</b> Warranty

Order Code	<b>SR/LED/230</b>
Mode of operation	Mains
Input voltage	230/240V 50/60Hz
Power consumption	18VA, $I_{nom} = 0.75A$
Lamp	$P_{rated} = 12W$ LED
Lamp colour	3000K (Selectable between 3000K & 4000K using switch on LED plate)
Luminaire lumen level in mains	1500lm
Lamp Lifetime	$L_{80} B_{50}$
Nominal lamp current in mains	0.35A
Maximum output voltage with no lamp connected	U OUT = 60 VDC
Ingress protection	IP65
Luminaire class	Class II
Product Weight	0.77 kg
Packaging Weight	0.25Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity

## Materials

Housing: Polycarbonate

Standard Colour: White - RAL 9016

Alternative Colours: Black - RAL 9017  
Add **/BL** to Order Code

## Warranty

Standard Warranty: 3 Years

Alternative Warranty: 6 Years  
Add **/6Y** Years to Order Code

Deep Trim supplied as Standard

Add **/NT** for Slim Trim

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Lumens (Mains)	Dimensions (mm)	
							A	B
<b>Mains</b>	<b>SR/LED/230</b>	<b>Mains</b>	-	-	-	<b>1500</b>	<b>90</b>	<b>320</b>
Alternative Systems Available: Specification Sheets Available Upon Request								
Standalone c/w MWS	SRM3/LED/MWS	Maintained	6.4V, 1500mAh LiFePO4	70159	274	1500	90	320
Standalone	SRM3/LED	Maintained	6.4V, 1500mAh LiFePO4	70159	274	1500	90	320
Mains c/w MWS	SR/LED/230/MWS	Mains	-	-	-	1500	90	320