


# EXLUX

## Double-Sided Box Exit

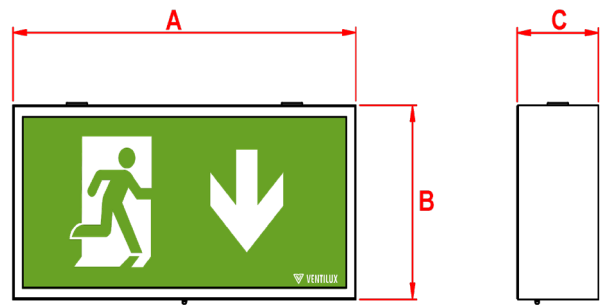

IP 40	6Y Warranty	36m Viewing Distance	Ceiling Mounted
Class I	2.1 Kg	NiMh Battery	6500K

## Materials

Housing:	Painted Steel
Panel Legend:	Polycarbonate
Standard Colour:	White Ral 9016
Alternative Colour:	Black - RAL 9017 Add /BL to order code

## Warranty

Standard Warranty:	6 Years
Alternative Warranty:	10 Years Add /10Y to order code

Order Code	EXM3/LED/2
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	7VA, $I_{nom} = 0.025A$
Battery charger	Nominal charge 0.05A
Battery charging limits	39mA to 80mA - 4.0Vdc to 7.0Vdc
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8Vdc	0.28A
Battery discharging limits	up to 0.4A for 3 hours
Lamp	2 x 8 String SM LED Strip
Lamp Life	$L_{80B50}$ 80000 Hours
Nominal lamp current	$I_{rated} = 0.35A$
Nominal lamp power	$P_{rated} = 1W$
Degree of protection	IP40 - for indoor use only.
Cable entry	Two 20mm conduit points on top of fitting,
Luminaire class	Class I
Weight	2.1kg
Packaging Weight	0.161kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
Standalone	EXM3/LED/2	Maintained	4.8V 1.3Ah NiMh	70229	36 Metres	430	200	102
Alternative Systems Available:								
Central Battery	EX/LED/230S/2	Slave	n/a	n/a	36 Metres	430	200	102


## Legends (Ordered Separately)




Left Arrow  
PN: 01710



Down Arrow  
PN: 01733



Right Arrow  
PN: 01754



Up Arrow  
PN: 01775