


# CTL 2X18W

## Compact Emergency Twinspot

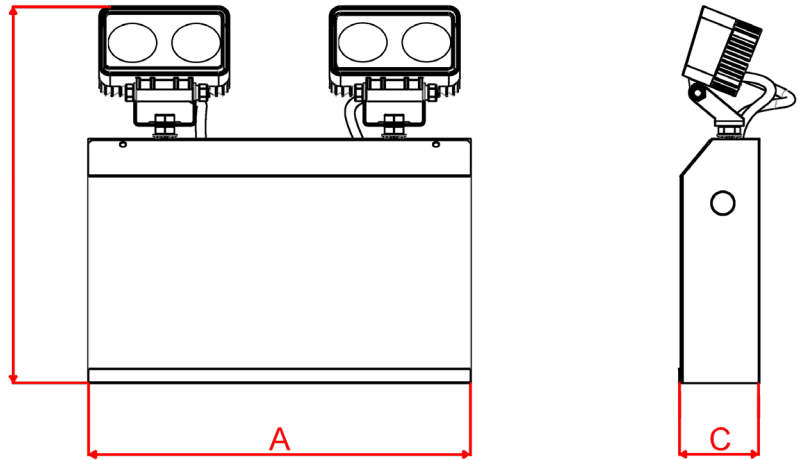

|            |                |                  |                  |
|------------|----------------|------------------|------------------|
| IP<br>40   | 3Y<br>Warranty | 2x1085<br>Lumens | Wall<br>Mounting |
| Class<br>I | 7.4Kg          | SLA<br>Battery   | 6500K            |

### Materials

Housing: Powder Coated Sheet Steel  
Lamp Heads: Die cast aluminum with polycarbonate lenses

Housing Colour: White RAL 9016  
Other colours available on request

### Warranty

Standard Warranty: 3 Years  
Alternative Warranty: 6 Years  
Add /6Y to Order Code

|                            |   |
|----------------------------|---|
| Order Code                 | CTL2X18WLED/NM3   |
| Mode of operation          | Non-Maintained  |
| Input voltage              | 230/240V (207VAC - 264VAC) 50/60Hz  |
| Battery charger            | Fully automatic, current limited constant voltage   |
| Lamp                       | 2 x LED lamp heads total wattage 36 watts<br>Each LED lamp contains 2 high power LEDs<br>Swivel & Tilt Lamp Heads |
| Lamp lumen level emergency | 1085 lumens for each lamp head  |
| Degree of protection       | IP40  |
| Overall dimensions (mm)    | 330mm L x 310mm H x 69mm D  |
| Battery                    | Rechargeable sealed lead acid battery 12V 7.0Ah x 2   |
| Power consumption          | 20VA for 24 hours upon initial charge<br><9VA once charged  |
| Cable entry                | 20mm on sides and rear of product   |
| Emergency duration         | 3 hours   |
| Weight                     | 7.4 kg  |
| Packaging Weight           | 0.23 kg   |
| Standards                  | EN 60598.2.22<br>EN61347-2-7<br>EN55015   |
| Environment                | 0°C to 30°C up to 80% relative humidity   |

| System                                | Order Code      | Mode of Operation | Battery         | Battery P/N | Lumens (Emergency) | Dimensions (mm) |     |    |
|---------------------------------------|-----------------|-------------------|-----------------|-------------|--------------------|-----------------|-----|----|
|                                       |                 |                   |                 |             |                    | A               | B   | C  |
| Standalone                            | CTL2X18WLED/NM3 | Non-Maintained    | 12V 7Ah (Qty:2) | 70162       | 2 x 1085           | 330             | 310 | 69 |
| <b>Alternative Systems Available:</b> |                 |                   |                 |             |                    |                 |     |    |
| Central Battery                       | ZCTL2X18WL230S  | Slave             | n/a             | n/a         | 2 x 1085           | 330             | 310 | 69 |