


# EXLUX

IP67 Box Exit

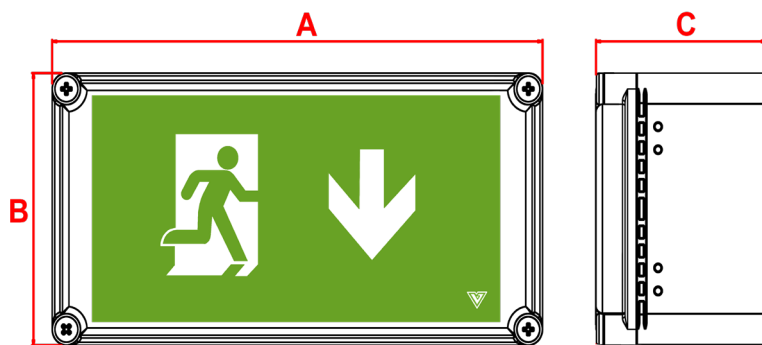

<b>IP 67</b>	<b>6Y</b> Warranty	<b>IK 10</b>	Wall Mounted
<b>32m</b> Viewing Distance	1.8 Kg	4.8V 1.3Ah NiMh Battery	<b>6500K</b>

Order Code	EXM3/LEDIP67/**
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	5VA, $I_{nom} = 0.025A$
Battery charger	Nominal charge 0.05A
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8Vdc	0.28A
Battery discharging limits	up to 0.4A for 3 hours
Lamp	8 x High Powered White LEDs
Lamp Life	$L_{80} B_{50}$ 80000 Hours
Nominal lamp current	$I_{rated} = 0.35A$
Nominal lamp power	$P_{rated} = 1W$
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Weight	1.8kg
Packaging Weight	0.22kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

## Materials

Housing: ABS  
 Lid: Polycarbonate  
 Adhesive Legend: Polycarbonate

Standard Colour: Grey Ral 7032

## Warranty

Standard Warranty: 6 Years  
 Alternative Warranty: 10 Years  
 Add **/10Y** to order code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
Standalone	EXM3/LEDIP67/**	Maintained	4.8V 1.3Ah NiMh	70229	32 Metres	379	189	132
Alternative Systems Available:								
Central Battery	ZEXLED240SIP**	Slave	n/a	n/a	32 Metres	379	189	132
DALI	ZEXM3LIP67DAL**	Maintained	3.6V 4.5Ah NiMh	70232	32 Metres	379	189	132


## Alternative Legends



Replace \*\* with 01 for application of Left Arrow  
 PN: 01970



Replace \*\* with 02 for application of Down Arrow  
 PN: 01971



Replace \*\* with 03 for application of Right Arrow  
 PN: 01972



Replace \*\* with 04 for application of Up Arrow  
 PN: 01973