
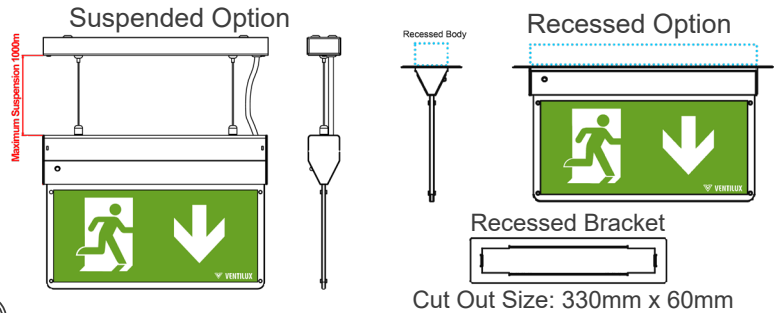


# Fusion

## Multi-Mounted Exit Sign

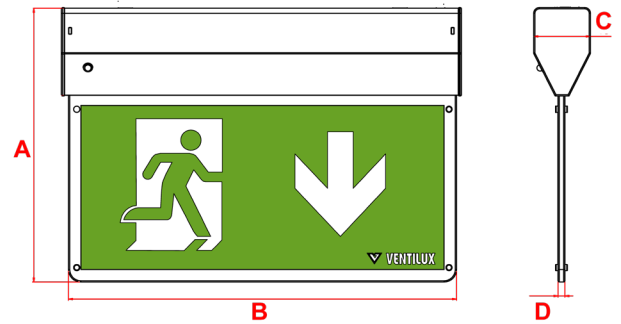

25 Viewing Distance	IP 20	Ni-Cd Battery	Wall, Suspended, Recessed Mounting
1.5Kg	6500K	Class I	3Y Warranty

### Materials

Housing: Aluminum  
Panel: Polycarbonate  
Decals: Polycarbonate

Standard Colour: \*White - RAL 9016  
Add **/WH** to Order Code

Alternative Colours: \*Black - RAL 9017  
Add **/BL** to Order Code  
\*Chrome  
Add **/BCH** to Order Code

### Warranty

Standard Warranty: 3 Years  
Alternative Warranty: 6 Years  
Add **/6Y** Years to Order Code

Order Code	FSM3/LED*
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	4VA, I <sub>nom</sub> = 17mA (Full Battery)
Battery type	Rechargeable high temp Ni-Cd 3.6V 0.8Ah/h
Battery low voltage cut off	3.4V DC
Battery discharge current @ 3.6V DC	0.15A
Lamp	0.4W LED
Lamp colour	6500K
Viewing Distance	25m
Lamp Lifetime	L <sub>80</sub> B <sub>50</sub>
Nominal lamp voltage	V <sub>rated</sub> = 2.8V DC
Nominal lamp current	I <sub>rated</sub> = 0.14A CC
Nominal lamp power	P <sub>rated</sub> = 0.4W
Maximum output voltage with no lamp connected	U-OUT = 5V DC
Ingress protection	IP20
Cable entry	Rear of product
Luminaire class	Class I
Weight	1.5 Kg
Packaging Weight	0.205 Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)			
						A	B	C	D
Standalone	FSM3/LED*	Maintained	3.6V, 0.8Ah Ni-Cd	70145	25m	218	310	45	5.5


### Included Legends




ISO 01



ISO 02



ISO 03



ISO 04