


Recessed Stylux

Blade Exit

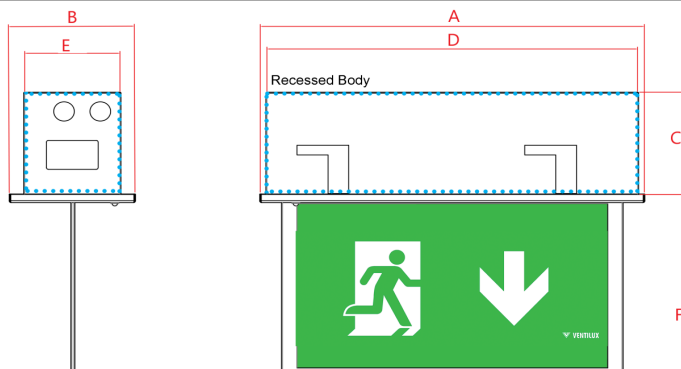

IP 40	6Y Warranty	28m Viewing Distance	Recessed Ceiling Mounted
Class I	1.85 Kg	NiMh Battery	6500K

Materials

Housing: Sheet Steel
 Front Plate: Powder coated sheet steel
 Panel Legend: Polycarbonate

Standard Colour (front): White Ral 9016

Alternative Colours: Black -Add **/BL** to order code
 Chrome- Add **/CH** to order code

Warranty

Standard Warranty: 6 Years
 Alternative Warranty: 10 Years
 Add **/10Y** to order code

Order Code	RSTM3/LED
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	5VA
Battery charger	Nominal charge 0.05A
Battery charging limits	0.039A to 0.08A - 4.0Vdc to 7.0Vdc
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8Vdc	0.28A
Battery discharging limits	up to 0.4A for 3 hours
Lamp	8 x High Powered Samsung White LEDs
Viewing Distance	28m
Lamp Lifetime	$L_{80}^{B_{50}}$ 80000 Hours
Nominal lamp current	$I_{rated} = 0.35mA$
Nominal lamp power	$P_{rated} = 1W$
Degree of protection	IP40
Ceiling Cut-Out Diameter	362mm X 96mm (Minimum Ceiling void-110mm)
Luminaire class	Class I
Weight	1.85kg
Packaging Weight	0.162kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)					
						A	B	C	D	E	F
Standalone	RSTM3/LED	Maintained	4.8V 1.3Ah NiMh	70229	28 Metres	372	122	105	360	94	176
Alternative Systems Available:											
Central Battery	ZRSTLED230S	Slave	n/a	n/a	28 Metres	372	122	105	360	94	176
DALI	RSTM3/LED/DA	Maintained	3.6V 4.5Ah NiMh	70151	28 Metres	372	122	105	360	94	176
DALI Central Battery	ZRSTLED230SDA	Slave	n/a	n/a	28 Metres	372	122	105	360	94	176


Legends (Ordered Separately)



Left /Right Arrow (Left one side, Right opposite side)
 PN: LPSTISO13MVL



Down Arrow (both sides)
 PN: LPSTISO02MVL

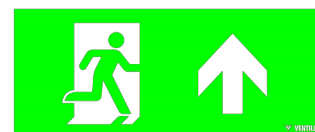

Up Arrow (both sides)
 PN: LPSTISO04MVL

Additional options of Printed Panels available. Contact Ventilux for further details.