


# Vela

## Wall Mounted Exit Sign

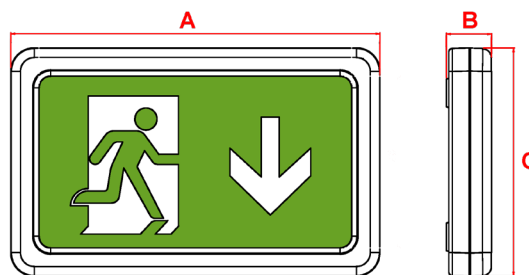

30m Viewing Distance	IP 20	Ni-Cd Battery	Wall Mounting
1.1Kg	6500K	Class II	3Y Warranty

Order Code	<b>VLM3/LED</b>
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	7VA, $I_{nom} = 20mA$ (Full Battery)
Battery type	Rechargeable high temp NiCd 3.6V 1.5Ah
Battery low voltage cut off	5.2V DC
Battery discharge current @ 6.4V DC	1.2A
Lamp	0.7W LED
Lamp colour	6500K
Lamp lumen level in emergency	70lm
Lamp Lifetime	$L_{80 B50}$
Nominal lamp voltage	$V_{rated} = 8.5V DC$
Nominal lamp current	$I_{rated} = 0.67A CC$
Nominal lamp power	$P_{rated} = 0.7W$
Maximum output voltage with no lamp connected	U-OUT = 15V DC
Ingress Protection	IP20
Cable entry	Rear BESA Box Entry
Luminaire class	Class II
Product Weight	1.1 Kg
Packaging Weight	0.096Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity.

### Materials

Housing: Polycarbonate  
 Decal Legends: Polycarbonate

Standard Colour: White - RAL 9016

Alternative Colour: Black - RAL 9017  
 Add **/BL** to Order Code

### Warranty

Standard Warranty: 3 Years  
 Alternative Warranty: 6 Years  
 Add **/6Y** Years to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
Standalone	VLM3/LED	Maintained	3.6V, 1.5Ah Ni-Cd	70149	30m	320	39	198


### Included Legends




ISO 01



ISO 02



ISO 03



ISO 04