
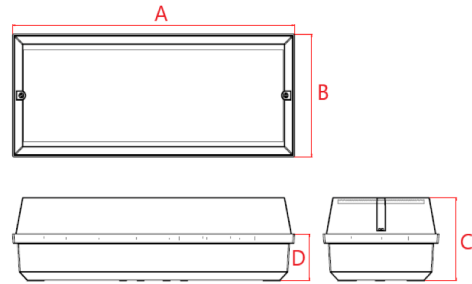


# Weather Proof

## 3W Emergency Bulkhead

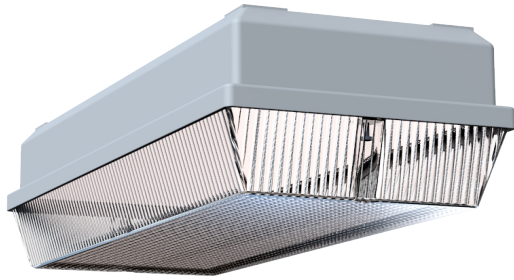

<b>IP 65</b>	<b>6Y</b> Warranty	<b>IK 10</b>	Wall & Ceiling Mounted
<b>420</b> Lumens	<b>1.4Kg</b>	NiCd Battery	<b>6000K</b>

Order Code	<b>WPNM3/LED3W/P</b>
Mode of operation	Non-Maintained
Emergency duration	3 Hours
Input voltage	230-240V AC
Power consumption	3.5VA
Battery type	4.8V 4.5Ah NiCd
Battery low voltage cut off	4V
Battery discharge current @ 4.8V DC	0.78A
Lamp	3 X 1 Watt CREE XP-G3 LED
Lamp colour	6000K Cool White
Lamp lumen level in emergency	420
Nominal lamp voltage	9V
Nominal lamp current	0.35A CC
Nominal lamp power	3 Watts
Maximum output voltage with no lamp connected	U-OUT=13.5V DC
Ingress Protection	IP65
Impact Resistance	IK10
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1.4 Kg
Packaging Weight	0.17 Kg
Standards	EN61347-2-7, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

### Materials

Housing: Polycarbonate (Base)  
Clear Polycarbonate (Diffuser)

Geartray: Powder coated sheet steel

Standard Colour: White RAL 9016  
Alternative Colours: Available on request

### Warranty

Standard Warranty: 6 Years  
Alternative Warranty: 10 Years  
Add /10Y to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
Standalone	WPNM3/LED3W/P	Non-Maintained	4.8V 4.5Ah NiCd	70123	420	370	150	102	58
Alternative Systems Available:									
Standalone	WPM3/LED3W/P	Maintained	4.8V 4.5Ah NiCd	70123	420	370	150	102	58
DALI	WPNM3/LED/3WDA	Non-Maintained	6V 4.5Ah NiCd	70153	420	370	150	102	58
Central Battery	ZWPLED3W230S	Slave	n/a	n/a	420	370	150	102	58
Dali Wireless	ZWPNM3LED5WPDWA	Non-Maintained	6.4V 6.4Ah LiFePO4	70258	800	370	150	102	58

Available Accessories					
Order Code	Description	Material	Cutout (mm)	Dimensions(mm)	
WP/SRK	Semi-Recessing Kit	Powder Coated Steel	360 x 143	398	179

### Photometrics

Mounting Height	Lighting level directly under Luminaire	↔		↔		↔		↔		↔	
		0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
2m	37.49	6.3	5.2	15.0	12.5	14.0	11.6	13.0	10.7	5.4	4.4
2.5m	24.03	6.9	5.7	16.7	13.8	15.5	12.9	14.3	11.9	5.9	4.9
3m	16.70	7.5	6.1	18.2	14.9	16.9	13.9	15.5	12.9	6.4	5.1
4m	9.40	8.4	6.6	20.6	16.8	19.2	15.6	17.7	14.4	7.2	5.2
6m	4.18	9.2	5.9	24.3	18.4	22.4	16.8	20.5	15.2	7.6	5.8
8m	2.35	8.2	5.5	26.4	16.4	23.7	16.4	20.9	16.4	8.2	5.6
10m	1.51	8.2	4.9	22.1	16.3	22.4	16.3	22.6	16.2	8.1	4.4

