
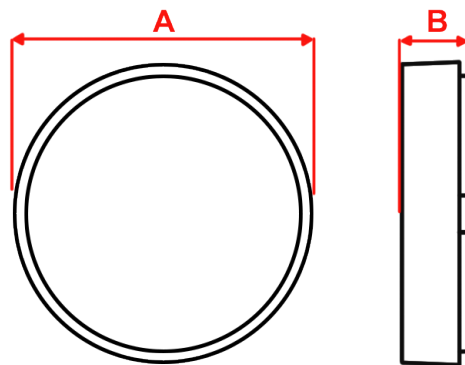


# Galaxy 2

Circular LED DALI Emergency Bulkhead

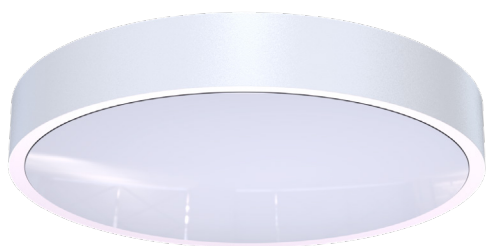

**2250**  
Mains  
Lumens

**630**  
Emergency  
Lumens

**4000K**

Ceiling  
and  
Wall  
Mounting

LiFePO4  
Battery

Class  
II

**IP**  
**65**

**6Y**  
Warranty

## Materials

Housing: Polycarbonate

Standard Colour: White - RAL 9003

Alternative Colours: Black - RAL 9005  
Add /BL to Order Code

Alternative Colours Available Upon Request

## Warranty

Standard Warranty: 6 Years

Alternative Warranty: 10 Years  
Add /10 Years to Order Code

|                                     |                                                       |
|-------------------------------------|-------------------------------------------------------|
| Order Code                          | <b>GC2M3/LED/DA</b>                                   |
| Mode of operation                   | Maintained DALI                                       |
| Emergency duration                  | 3 Hour                                                |
| Input voltage                       | 220-240V 50/60Hz                                      |
| Battery type                        | 6.4V 6.4Ah LiFePO4                                    |
| Battery low voltage cut off         | 5 VDC                                                 |
| Battery discharge current @ 6.4V DC | 0.98A                                                 |
| Lamp                                | LED                                                   |
| Lamp colour                         | 4000K                                                 |
| Lamp lumen level in Mains           | 2250lm                                                |
| Lamp Lifetime                       | $L_{80} B_{50}$ 50000Hrs                              |
| Lamp lumen level in emergency       | 630lm                                                 |
| Ingress Protection                  | IP65                                                  |
| Impact Resistance                   | IK10                                                  |
| Cable entry                         | 20mm on sides and rear of product                     |
| Luminaire class                     | Class II                                              |
| Product Weight                      | 1.6Kg                                                 |
| Packaging Weight                    | 0.2Kg                                                 |
| Standards                           | EN61347-2-7, EN61347-2-13,<br>EN 60598-2-22, EN 55015 |
| Environment                         | 0°C to 40°C up to 80% relative humidity               |

| System                                                                     | Order Code          | Mode of Operation | Battery                   | Battery P/N  | Lumens (Mains) | Lumens (Emergency) | Dimensions (mm) |             |
|----------------------------------------------------------------------------|---------------------|-------------------|---------------------------|--------------|----------------|--------------------|-----------------|-------------|
|                                                                            |                     |                   |                           |              |                |                    | A               | B           |
| <b>DALI</b>                                                                | <b>GC2M3/LED/DA</b> | <b>Maintained</b> | <b>6.4V 6.4Ah LiFePO4</b> | <b>70258</b> | <b>2250</b>    | <b>630</b>         | <b>352</b>      | <b>67.5</b> |
| Alternative Systems Available: Specification Sheets Available Upon Request |                     |                   |                           |              |                |                    |                 |             |
| Standalone                                                                 | GC2M3/LED           | Maintained        | 6.4V 1.5Ah LiFePO4        | 70159        | 2250           | 200                | 352             | 67.5        |
| Mains                                                                      | GC2/LED/230         | Mains             | -                         | -            | 2250           | -                  | 352             | 67.5        |

