
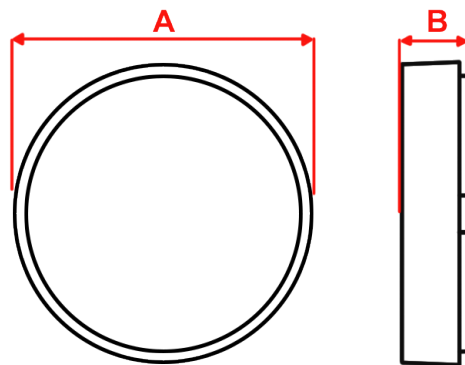


Galaxy 2

Circular LED Mains Bulkhead

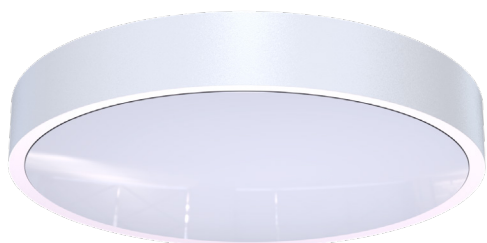

2250 Lumens	18 Watts	3000K/ 4000K	Ceiling and Wall Mounting
LED	Class II	IP 65	8Y Warranty

Materials

Housing: Polycarbonate

Standard Colour: White - RAL 9003
Alternative Colours: Black - RAL 9005
Add /BL to Order Code

Alternative Colours Available Upon Request

Warranty

Standard Warranty: 8 Years
Alternative Warranty: 10 Years
Add /10 Years to Order Code

Order Code	GC2/LED/230
Mode of operation	Mains
Input voltage	220-240V 50/60Hz
Lamp	LED
Lamp colour	4000K
Lamp lumen level in Mains	2250lm
Lamp Lifetime	L ₈₀ B ₅₀ 50000Hrs
MacAdam Ellipse/SDCM rating	<6
Ingress Protection	IP65
Impact Resistance	IK10
Cable entry	20mm on rear of product
Luminaire class	Class II
Product Weight	1.2Kg
Packaging Weight	0.2Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Mains)	Lumens (Emergency)	Dimensions (mm)	
							A	B
Mains	GC2/LED/230	Mains	-	-	2250	-	352	67.5
Alternative Systems Available: Specification Sheets Available Upon Request								
Standalone	GC2M3/LED	Maintained	6.4V 1.5Ah LiFePO4	70271	2250	200	352	67.5
Central Battery	GC2/LED/230S	Slave	-	-	2250	-	352	67.5
DALI	GC2M3/LED/DA	Maintained	6.4V 6.4Ah LiFePO4	70258	2250	630	352	67.5
DALI Wireless	GC2M3/LED/DAW	Maintained	6.4V 6.4Ah LiFePO4	70258	2250	630	352	67.5
Dual DALI	GC2M3/LED/DADA	Dual Mains & Maintained DALI	6.4V 6.4Ah LiFePO4	70258	2250	630	352	67.5

