


# WTL 2X9W

IP67 Emergency DALI Slave Twinspot

**VENTILUX**  
Lighting the path to safety together

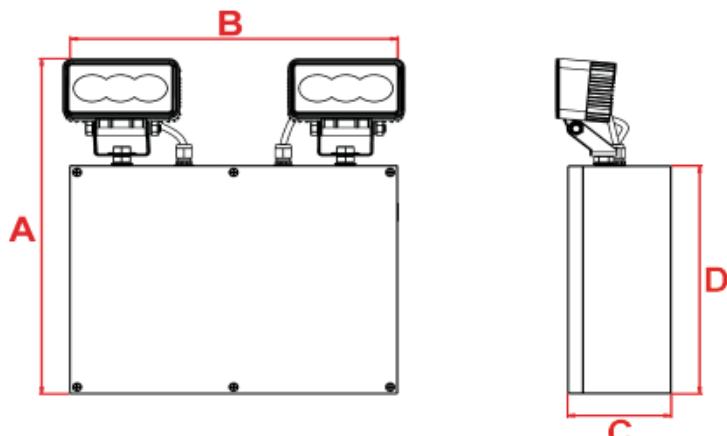

IP  
67

6Y  
Warranty

Class  
I

Wall  
Mounting

2x490  
Lumens

3.4Kg

6000K

## Materials

Housing:

Polycarbonate

Lamp Heads:

Die cast aluminum with  
polycarbonate lenses

Standard Colour:

Grey RAL 7032

Order Code	ZWTL2X9WL230SDA
Mode of operation	DALI 2 Slave
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Lamp	2 x LED lamp heads total wattage 18 watts Each LED lamp contains 3 high power LEDs Swivel & Tilt Lamp Heads
Lamp lumen level emergency	490 lumens for each lamp head
Degree of protection	IP67
Power consumption	18VA
Inrush Current	5A 150 <sub>μ</sub> s
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Weight	3.4kg
Packaging Weight	0.235 kg
Standards	EN 60598-2.22 EN61347-2-7 EN55015
Environment	0°C to 55°C up to 80% relative humidity

## Warranty

Standard Warranty:

6 Years

Alternative Warranty:

10 Years

Add **10Y** to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
DALI Central Battery	ZWTL2X9WL230SDA	Slave	n/a	n/a	2 x 490	348	316	100	237

### Alternative Systems Available:

Standalone	WTL2X9WLED/NM3	Non-Maintained	12V 7Ah SLA	70162	2 x 490	348	316	100	237
DALI	WTL2X5WLED/NM3/DA	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	2 x 350	348	316	100	237
Central Battery	ZWTL2X9WL230S	Slave	n/a	n/a	2 x 490	348	316	100	237