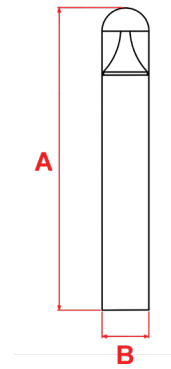


Waylite

IP65 Emergency Bollard

**2400**
Lumens**25**
Watts

4000K

Floor
MountingClass
I**IK**

09**IP**
65**8Y**
Warranty

Materials

Housing:
Diffuser:Die Cast Aluminium
Polycarbonate

Standard Colour:

Black - RAL 9017

Warranty

Standard Warranty:
Alternative Warranty:8 Years
10 Years
Add /10 Years to Order Code

Order Code	WAYM3/LED
Mode of operation	Maintained
Emergency duration	3 Hours
Input voltage	230/240V 50/60Hz
Battery type	4.8V 4.5Ah NiCd
Lamp	LED
Lamp colour	4000K
Lumens/Watt	96
Ingress Protection	IP65
Impact Resistance	IK09
Cable entry	Base of product
Luminaire class	Class I
Product Weight	4Kg
Packaging Weight	0.5Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Mains)	Lumens (Emergency)	Dimensions (mm)	
							A	B
Standalone	WAYM3/LED	Maintained	4.8V 4.5Ah NiCd	70123	2400	384	1000	168
Alternative Systems Available: Specification Sheets Available Upon Request								
Mains	WAY/LED/230	Mains	-	-	2400	-	1000	168
DALI	WAYM3/LED/DA	Maintained	6.4V 6.4Ah LiFePO4	70258	2400	480	1000	168
Self Test	WAYM3/LED/ST	Maintained	6.4V 6.4Ah LiFePO4	70258	2400	480	1000	168
DALI Wireless	WAYM3/LED/DAW	Maintained	6.4V 6.4Ah LiFePO4	70258	2400	480	1000	168
Central Battery	WAYM/LED/230MFRS	Slave	-	-	2400	-	1000	168

Available Accessories		
Order Code	Description	Material
WAYLITE ROOT KIT	Root Kit	Stainless Steel